

Edition: 05/06 - subject to change

Supersedes: /  
Status: valid


**64752 (230/240V)**

## ■ Product description

The OSRAM 64752 is used for theatre lighting and fitted into Frensel, Profile, PC Spot and Follow Spot luminaires. The 64754 CP/90 is an equivalent for 3200K.

## ■ Technical Data

Lamp / order reference	64752	
ANSI	FWS	
LIF	T/29	
Rated lamp wattage	W	1200
Rated lamp voltage	V	230/240
Average life-time	h	400
Color temperature	K	3000
Luminous flux	lm	28600
Luminous efficiency	Lm/W	23,80
Base	GX 9.5	
Diameter d	mm	27 max.
Lamp length L	mm	125 max.
LCL a	mm	67 ± 2
Filament dimensions (w x h)	mm	13 x 15
Type of filament	biplan	

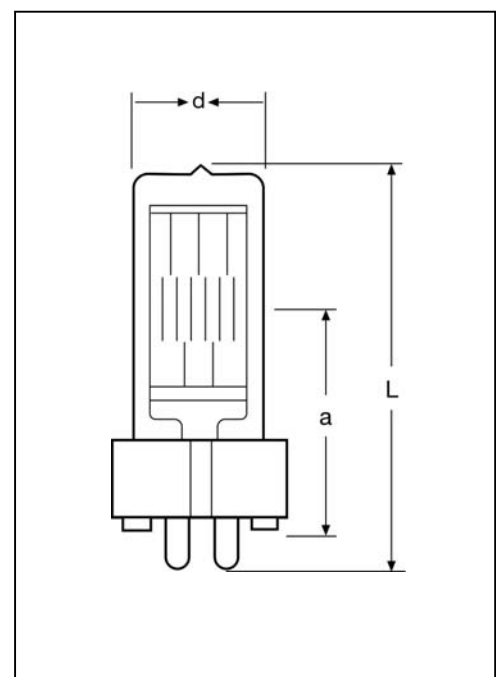

## ■ Lamp operation

Max. pinch seal	°C	350°C
Burning position	s90	
Fuse protection	D-Fusing 500V, 10A quick	
Remarks	Use of closed luminaires is recommended.	