

Lighting

PHILIPS

MASTER TL5 High Output

MASTER TL5 HO 49W/830 SLV/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

eneral Information		Color Designation	Warm White (WW
ap-Base	G5 [G5]	Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W
ife to 50% Failures Preheat (Nom)	30000 h	Correlated Color Temperature (Nom)	3000 K
Features	na [Not Applicable]	Luminous Efficacy (rated) (Nom)	89 lm/W
System Description	High Output	Color Rendering Index (Max)	85
LSF Preheat 2000 h Rated	99 %	Color Rendering Index (Min)	80
LSF Preheat 4000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF Preheat 6000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF Preheat 8000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF Preheat 16000 h Rated	97 %	LLMF 6000 h Rated	94 %
LSF Preheat 20000 h Rated	84 %	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
Light Technical		LLMF 16000 h Rated	91 %
Color Code	830 [CCT of 3000K]	LLMF 20000 h Rated	90 %
Luminous Flux (Nom)	4900 lm		
Luminous Flux (Rated) (Nom)	4375 lm		

MASTER TL5 High Output

Operating and Electrical			
Power (Nom)	49.2 W		
Lamp Current (Nom)	0.255 A		
Temperature			
Design Temperature (Nom)	35 ℃		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Cap-Base Information	Green Plate		
Approval and Application			
Energy Efficiency Label (EEL)	A+		


Mercury (Hg) Content (Nom)	1.4 mg		
Energy Consumption kWh/1000 h	54 kWh		
Product Data			
Full product code	871150063954755		
Order product name	MASTER TL5 HO 49W/830 SLV/40		
EAN/UPC - Product	8711500639547		
Order code	927927583055		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	40		
Material Nr. (12NC)	927927583055		
Net Weight (Piece)	128.700 g		
ILCOS Code	FDH-49/30/1B-L/P-G5-16/1450		

Dimensional drawing

a 🗌		
	// A	
	В	
	С	


TL5 HO 49W/830

Photometric data

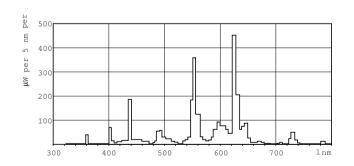

LDPB_TL5-HO8_830-Spectral power distribution B/W


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm
49W/830 SLV/40					

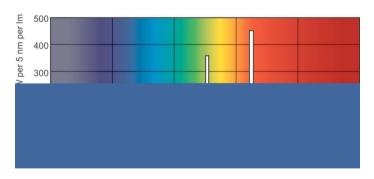


LDPO_TL5-HO8_830-Spectral power distribution Colour

MASTER TL5 High Output

Lifetime

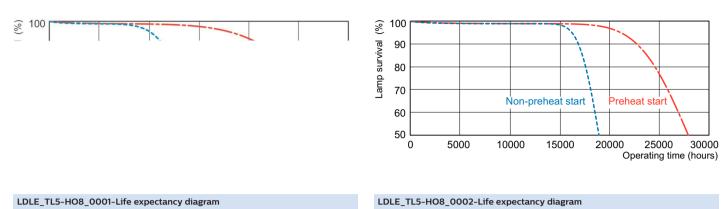

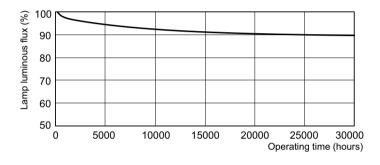

LDLM_TL5-HO8_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, October 15 - data subject to change