



# MASTER TL5 High Output Secura

## MASTER TL5 HO Secura 49W/840 UNP/40

This TL5 High Output Secura lamp (tube diameter 16 mm) has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by a blue ring at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. This lamp is compliant with HACCP regulations and supports HACCP certification.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- In order to ensure the integrity of the coating, it is strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.

### Product data

General Information	
Cap-Base	G5 [ G5]
Life to 50% Failures Preheat (Nom)	30000 h
System Description	High Output
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %

Light Technical	
Color Code	840 [ CCT of 4000K]
Luminous Flux (Nom)	4375 lm
Luminous Flux (Rated) (Nom)	4375 lm
Color Designation	Cool White (CW)
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	89 lm/W
Color Rendering Index (Max)	85
Color Rendering Index (Min)	80
Color Rendering Index (Nom)	82
LLMF 2000 h Rated	96 %

# MASTER TL5 High Output Secura

LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

## Operating and Electrical

Power (Nom)	49.2 W
Lamp Current (Nom)	0.255 A

## Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Cap-Base Information	Green Plate
----------------------	-------------


## Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	54 kWh

## Product Data

Full product code	871150095227155
Order product name	MASTER TL5 HO Secura 49W/840 UNP/40
EAN/UPC - Product	8711500952271
Order code	927927684018
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927927684018
Net Weight (Piece)	132.000 g
ILCOS Code	FDH-49/40/1B-L/P-G5-16/1450


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Secura 49W/840 UNP/40	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

## TL5 HO Secura 49W/840

## Photometric data

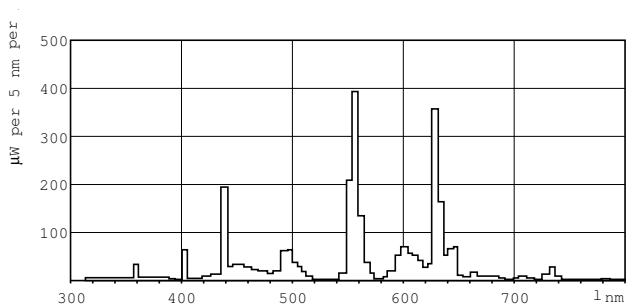

LDPB\_TL5HO8SE\_840-Spectral power distribution B/W

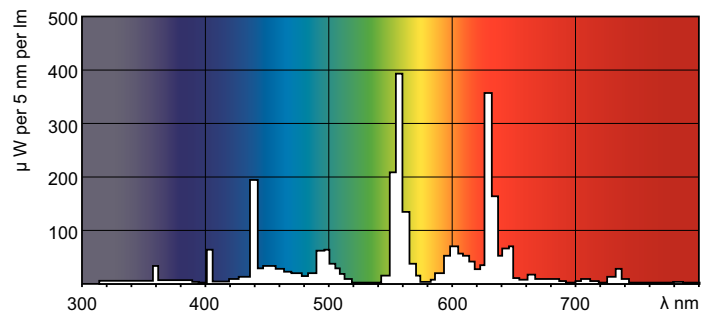

LDPO\_TL5HO8SE\_840-Spectral power distribution Colour


# MASTER TL5 High Output Secura

## Lifetime



LDLE\_TL5HO8SE\_0001-Life expectancy diagram

LDLE\_TL5HO8SE\_0002-Life expectancy diagram

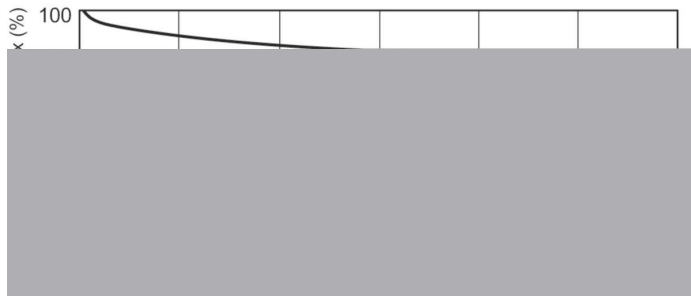

LDLM\_TL5HO8SE\_0001-Lumen maintenance diagram

