



MASTER TL5 High Output

MASTER TL5 HO 39W/865 SLV/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	G5 [G5]		
Life to 50% Failures Preheat (Nom)	30000 h		
Features	na [Not Applicable]		
System Description	High Output		
LSF Preheat 2000 h Rated	99 %		
LSF Preheat 4000 h Rated	99 %		
LSF Preheat 6000 h Rated	99 %		
LSF Preheat 8000 h Rated	99 %		
LSF Preheat 16000 h Rated	97 %		
LSF Preheat 20000 h Rated	84 %		
Light Technical			
Color Code	865 [CCT of 6500K]		
Luminous Flux (Nom)	3250 lm		
Luminous Flux (Rated) (Nom)	2875 lm		

Color Designation	Cool Daylight		
Luminous Efficacy (@ Max Lumen, Rated) (Nom)	86 lm/W		
Correlated Color Temperature (Nom)	6500 K		
Luminous Efficacy (rated) (Nom)	76 lm/W		
Color Rendering Index (Max)	85		
Color Rendering Index (Min)	80		
Color Rendering Index (Nom)	82		
LLMF 2000 h Rated	96 %		
LLMF 4000 h Rated	95 %		
LLMF 6000 h Rated	94 %		
LLMF 8000 h Rated	93 %		
LLMF 12000 h Rated	92 %		
LLMF 16000 h Rated	91 %		
LLMF 20000 h Rated	90 %		


Datasheet, 2020, October 15 data subject to change

MASTER TL5 High Output

Operating and Electrical			
Power (Nom)	38.0 W		
Lamp Current (Nom)	0.325 A		
Temperature			
Design Temperature (Nom)	35 ℃		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Cap-Base Information	Green Plate		
Approval and Application			
Energy Efficiency Label (EEL)	A		

Mercury (Hg) Content (Nom)	1.4 mg			
Energy Consumption kWh/1000 h	42 kWh			
Product Data				
Full product code	871150064387255			
Order product name	MASTER TL5 HO 39W/865 SLV/40			
EAN/UPC - Product	8711500643872			
Order code	927928586555			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	40			
Material Nr. (12NC)	927928586555			
Net Weight (Piece)	79.200 g			
ILCOS Code	FDH-39/65/1B-L/P-G5-16/850			


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO	17 mm	849.0 mm	856.1 mm	853.7 mm	863.2 mm
39W/865 SLV/40					

TL5 HO 39W/865

Photometric data





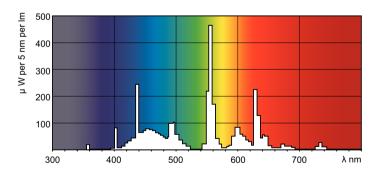


LDPO_TL5-HO8_865-Spectral power distribution Colour


MASTER TL5 High Output


Lifetime



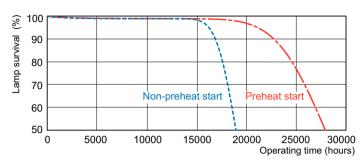

LDLE_TL5-HO8_0001-Life expectancy diagram



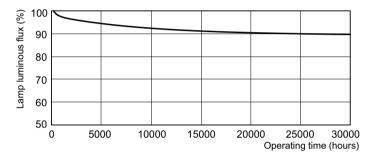

LDLM_TL5-HO8_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.