



MASTER TL5 High Output

MASTER TL5 HO 54W/830 SLV/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | |
|------------------------------------|----------------------|--|--|
| Cap-Base | G5 [G5] | | |
| Life to 50% Failures Preheat (Nom) | 30000 h | | |
| Features | na [Not Applicable] | | |
| System Description | High Output | | |
| LSF Preheat 2000 h Rated | 99 % | | |
| LSF Preheat 4000 h Rated | 99 % | | |
| LSF Preheat 6000 h Rated | 99 % | | |
| LSF Preheat 8000 h Rated | 99 % | | |
| LSF Preheat 16000 h Rated | 97 % | | |
| LSF Preheat 20000 h Rated | 84 % | | |
| | | | |
| Light Technical | | | |
| Color Code | 830 [CCT of 3000K] | | |
| Luminous Flux (Nom) | 5000 lm | | |
| Luminous Flux (Rated) (Nom) | ated) (Nom) 4500 lm | | |
| | | | |

| Color Designation | Warm White (WW) | | |
|--|-----------------|--|--|
| Luminous Efficacy (@ Max Lumen, Rated) (Nom) | 93 lm/W | | |
| Correlated Color Temperature (Nom) | 3000 K | | |
| Luminous Efficacy (rated) (Nom) | 83 lm/W | | |
| Color Rendering Index (Max) | 85 | | |
| Color Rendering Index (Min) | 80 | | |
| Color Rendering Index (Nom) | 85 | | |
| LLMF 2000 h Rated | 96 % | | |
| LLMF 4000 h Rated | 95 % | | |
| LLMF 6000 h Rated | 94 % | | |
| LLMF 8000 h Rated | 93 % | | |
| LLMF 12000 h Rated | 92 % | | |
| LLMF 16000 h Rated | 91 % | | |
| LLMF 20000 h Rated | 90 % | | |
| | | | |


Datasheet, 2020, October 15 data subject to change

MASTER TL5 High Output

| Operating and Electrical | | | |
|-------------------------------|-------------|--|--|
| Power (Nom) | 54.1 W | | |
| Lamp Current (Nom) | 0.455 A | | |
| Temperature | | | |
| Design Temperature (Nom) | 35 ℃ | | |
| | | | |
| Controls and Dimming | | | |
| Dimmable | Yes | | |
| | | | |
| Mechanical and Housing | | | |
| Cap-Base Information | Green Plate | | |
| | | | |
| Approval and Application | | | |
| Energy Efficiency Label (EEL) | A+ | | |

| Mercury (Hg) Content (Nom) | 1.4 mg | | | |
|---------------------------------|------------------------------|--|--|--|
| Energy Consumption kWh/1000 h | 59 kWh | | | |
| | | | | |
| Product Data | | | | |
| Full product code | 871150064316255 | | | |
| Order product name | MASTER TL5 HO 54W/830 SLV/40 | | | |
| EAN/UPC - Product | 8711500643162 | | | |
| Order code | 927929083055 | | | |
| Numerator - Quantity Per Pack | 1 | | | |
| Numerator - Packs per outer box | 40 | | | |
| Material Nr. (12NC) | 927929083055 | | | |
| Net Weight (Piece) | 105.800 g | | | |
| ILCOS Code | FDH-54/30/1B-L/P-G5-16/1150 | | | |
| | | | | |


Dimensional drawing




| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|----------------|---------|-----------|-----------|-----------|-----------|
| MASTER TL5 HO | 17 mm | 1149.0 mm | 1156.1 mm | 1153.7 mm | 1163.2 mm |
| 54W/830 SLV/40 | | | | | |

TL5 HO 54W/830

Photometric data





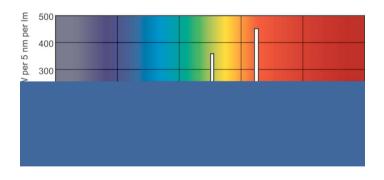


LDPO_TL5-HO8_830-Spectral power distribution Colour


MASTER TL5 High Output


Lifetime



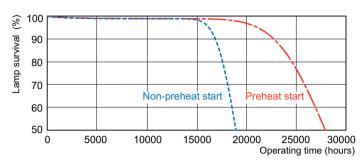

LDLE_TL5-HO8_0001-Life expectancy diagram



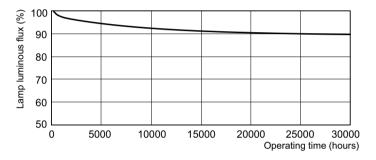

LDLM_TL5-HO8_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.