

# Lighting

**PHILIPS** 

# MASTER TL5 High Output

# MASTER TL5 HO 54W/865 SLV/40

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

#### Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information		Color Designation	Cool Daylight
ıp-Base	G5 [ G5]	Luminous Efficacy (@ Max Lumen, Rated) (Nom)	86 lm/W
e to 50% Failures Preheat (Nom)	30000 h	Correlated Color Temperature (Nom)	6500 K
tures	na [ Not Applicable]	Luminous Efficacy (rated) (Nom)	78 lm/W
tem Description	High Output	Color Rendering Index (Max)	85
Preheat 2000 h Rated	99 %	Color Rendering Index (Min)	80
Preheat 4000 h Rated	99 %	Color Rendering Index (Nom)	85
F Preheat 6000 h Rated	99 %	LLMF 2000 h Rated	96 %
F Preheat 8000 h Rated	99 %	LLMF 4000 h Rated	95 %
F Preheat 16000 h Rated	97 %	LLMF 6000 h Rated	94 %
F Preheat 20000 h Rated	84 %	LLMF 8000 h Rated	93 %
		LLMF 12000 h Rated	92 %
ght Technical		LLMF 16000 h Rated	91 %
olor Code	865 [ CCT of 6500K]	LLMF 20000 h Rated	90 %
iminous Flux (Nom)	4650 lm		
uminous Flux (Rated) (Nom)	4200 lm		

# **MASTER TL5 High Output**

Operating and Electrical				
Power (Nom)	54.1 W			
Lamp Current (Nom)	0.455 A			
Temperature				
Design Temperature (Nom)	35 ℃			
Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Cap-Base Information	Green Plate			
Approval and Application				
Energy Efficiency Label (EEL)	А			


Mercury (Hg) Content (Nom)	1.4 mg		
Energy Consumption kWh/1000 h	59 kWh		
Product Data			
Full product code	871150064391955		
Order product name	MASTER TL5 HO 54W/865 SLV/40		
EAN/UPC - Product	8711500643919		
Order code	927929086555		
Numerator - Quantity Per Pack	1		
Numerator - Packs per outer box	40		
Material Nr. (12NC)	927929086555		
Net Weight (Piece)	105.800 g		
ILCOS Code	FDH-54/65/1B-L/P-G5-16/1150		

## Dimensional drawing

a 📃	/	
	в	
	С	


#### TL5 HO 54W/865

### Photometric data

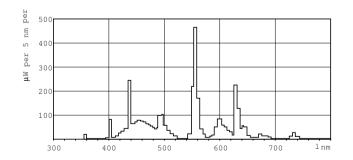

LDPB\_TL5-HO8\_865-Spectral power distribution B/W


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm
54W/865 SLV/40					

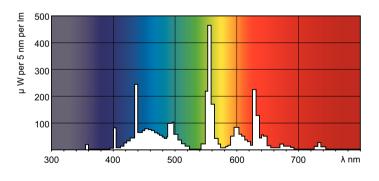




# **MASTER TL5 High Output**

Lifetime

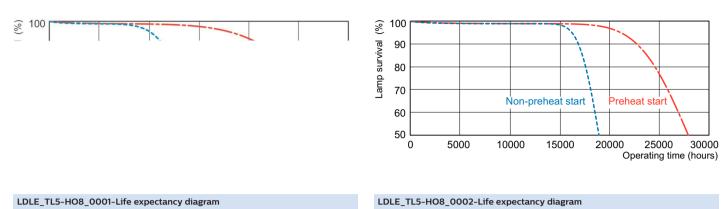

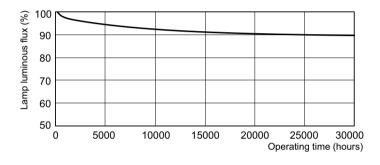

LDLM\_TL5-HO8\_0001-Lumen maintenance diagram



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, October 15 - data subject to change