



# MASTER TL5 High Output Eco

## MASTER TL5 HO Eco 20=24W/830 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

### Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information			
Cap-Base	G5 [ G5]	Luminous Flux (Nom)	1950 lm
Life to 50% Failures Preheat (Nom)	30000 h	Luminous Flux (Rated) (Nom)	1650 lm
Features	na [ Not Applicable]	Color Designation	Warm White (WW)
LSF Preheat 2000 h Rated	99 %	Luminous Efficacy (@ Max Lumen, Rated) (Nom)	99 lm/W
LSF Preheat 4000 h Rated	99 %	Correlated Color Temperature (Nom)	3000 K
LSF Preheat 6000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	85 lm/W
LSF Preheat 8000 h Rated	99 %	Color Rendering Index (Max)	85
LSF Preheat 16000 h Rated	99 %	Color Rendering Index (Min)	80
LSF Preheat 20000 h Rated	94 %	Color Rendering Index (Nom)	82
Light Technical		LLMF 2000 h Rated	96 %
Color Code	830 [ CCT of 3000K]	LLMF 4000 h Rated	95 %
		LLMF 6000 h Rated	94 %

# MASTER TL5 High Output Eco

LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

## Operating and Electrical

Power (Nom)	19.5 W
Lamp Current (Nom)	0.300 A

## Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Approval and Application

Energy Efficiency Label (EEL)	A+
-------------------------------	----

Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	22 kWh

## Product Data


Full product code	872790088084700
Order product name	MASTER TL5 HO Eco 20=24W/830 UNP/40
EAN/UPC - Product	8711500881304
Order code	927989983031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927989983031
Net Weight (Piece)	52.000 g
ILCOS Code	FDH-20/30/1B-L/P-G5-16/550

## Dimensional drawing


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Eco 20=24W/830 UNP/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

## TL5 HO Eco 20=24W/830

## Photometric data

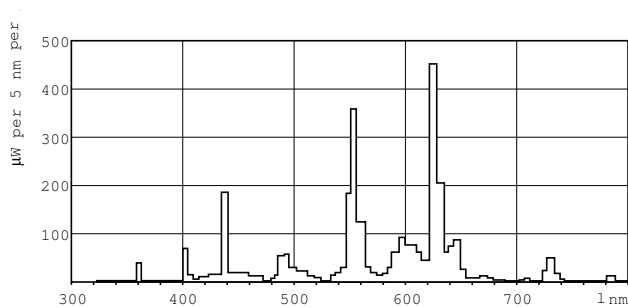

LDPB\_TL5ECO\_830-Spectral power distribution B/W

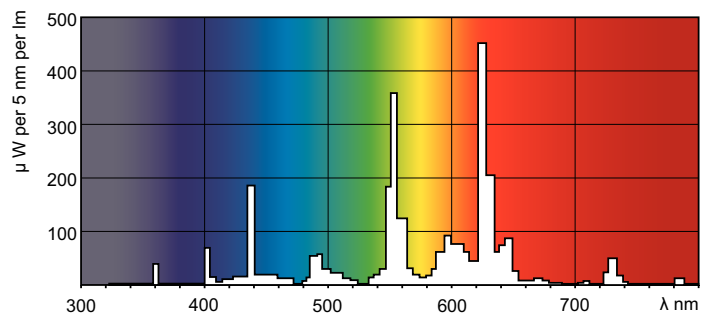

LDPO\_TL5ECO\_830-Spectral power distribution Colour

# MASTER TL5 High Output Eco

## Lifetime



LDLE\_TL5ECO\_0001-Life expectancy diagram

LDLE\_TL5ECO\_0002-Life expectancy diagram



LDLM\_TL5ECO\_0001-Lumen maintenance diagram

