



MSR Hot Restrike

MSR 400 HR 1CT/4

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


| General Information | | Color Rendering Index (Nom) | |
|------------------------------------|-----------------------------------|-------------------------------|--------|
| Cap-Base | GZZ9.5 [GZZ9.5] | | 92 |
| Operating Position | UNIVERSAL [Any or Universal (U)] | Operating and Electrical | |
| Main Application | Studio/Theatre | Power (Nom) | 400 W |
| Life to 50% Failures (Nom) | 1000 h | Lamp Current (Nom) | 7 A |
| System Description | Hot Restrike | Ignition Supply Voltage (Min) | 207 V |
| Light Technical | | Controls and Dimming | |
| Color Code | - [Not Specified] | Dimmable | Yes |
| Luminous Flux (Min) | 28080 lm | Mechanical and Housing | |
| Luminous Flux (Nom) | 31200 lm | Cap-Base Information | - |
| Chromaticity Coordinate X (Nom) | 323 | Luminaire Design Requirements | |
| Chromaticity Coordinate Y (Nom) | 328 | Bulb Temperature (Max) | 700 °C |
| Correlated Color Temperature (Nom) | 5830 K | | |
| Luminous Efficacy (rated) (Nom) | 78 lm/W | | |

MSR Hot Restrike

| | |
|-------------------------|------------------|
| Pinch Temperature (Max) | 350 °C |
| Product Data | |
| Full product code | 871829122796000 |
| Order product name | MSR 400 HR 1CT/4 |
| EAN/UPC - Product | 8718291227960 |
| Order code | 928050205115 |

| | |
|---------------------------------|--------------|
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 4 |
| Material Nr. (12NC) | 928050205115 |
| Net Weight (Piece) | 0.034 kg |



Dimensional drawing



MSR 400 HR

| Product | D (max) | O | L (min) | L (max) | L | C (max) | F (max) | F | F (min) |
|----------|---------|-----|---------|---------|----|---------|---------|------|---------|
| MSR 400 | 23 mm | 6.0 | 59 mm | 61 mm | 60 | 110 mm | 24 mm | 23.5 | 23 mm |
| HR 1CT/4 | | mm | | | mm | | | mm | |

Photometric data

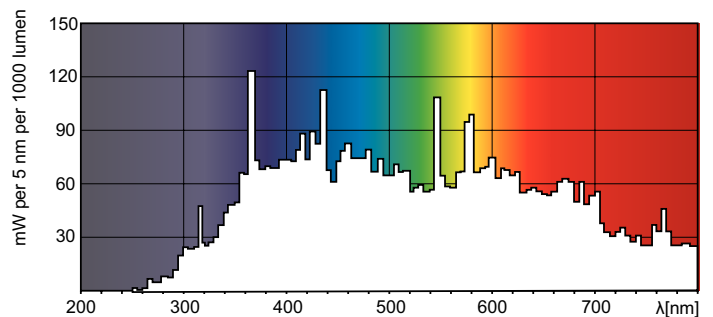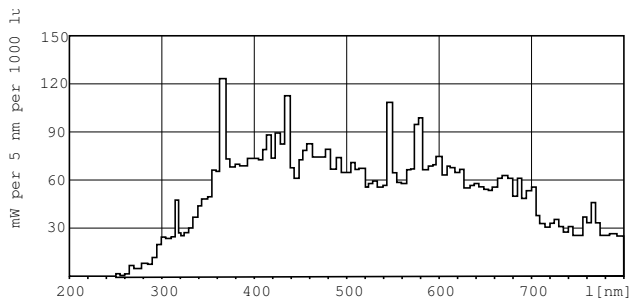

XDPO_XDMSR_HR_--Spectral power distribution Colour

