



# CorePro LED PLC 4P



## CorePro LED PLC 6.5W 840 4P G24q-2

The CorePro LED PLC 4P integrates a LED light source into a traditional fluorescent form factor. This product is the ideal solution for uplamping in general lighting applications: it meets basic lighting requirements, offers significant energy savings, and is environmentally friendly.

### Product data

General Information	
Cap-Base	G24Q-2 [G24q-2]
Nominal lifetime	30,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	700 lumen
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	92.31 lm/W
Color Consistency	<6
Color rendering index (CRI)	83
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Line Frequency	30000-80000 Hz
Input Frequency	30000-80000 Hz
Power Consumption	6.5 W
Starting Time (Nom)	0.5 s


Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	20-50 V
Temperature	
Ambient temperature range	-20 °C to 35 °C
T-Case Maximum (Nom)	66 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	100 mm
Bulb Shape	Tube, single-ended
Approval and Application	
Energy Efficiency Class	F
Energy Saving Product	Yes
Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	7 kWh
EPREL Registration Number	403553
CE mark	Yes

# CorePro LED PLC 4P

EU RoHS compliant	Yes
<b>Product Data</b>	
Full product code	871869654121000
Order product name	CorePro LED PLC 6.5W 840 4P G24q-2
Order code	929001201102
Numerator - Quantity Per Pack	1


Numerator - Packs per outer box	10
Material number (12NC)	929001201102
Full product name	CorePro LED PLC 6.5W 840 4P G24q-2
EAN/UPC - Case	8718696541227

## Dimensional drawing




Product	D1	D2	A1	A2	A3
CorePro LED PLC 6.5W 840 4P G24q-2	24.3 mm	28.4 mm	105.8 mm	125 mm	140.6 mm

## Photometric data




OSRAM ROADSTAR 41 - Photo Lighting ETC Page 11

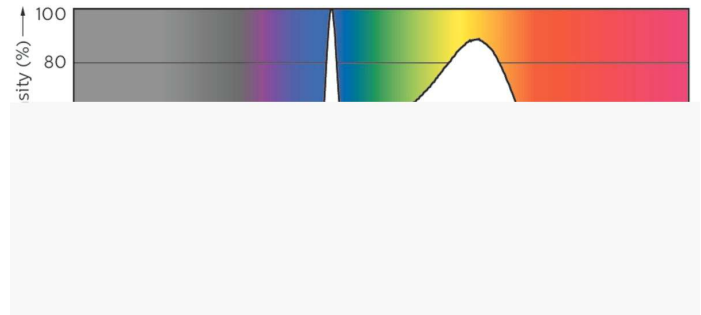

General uniform lighting - CorePro LED PLC 6.5W 840 4P G24q-2



Spectral Power Distribution Colour - CorePro LED PLC 6.5W 840 4P G24q-2




Light Distribution Diagram - CorePro LED PLC 6.5W 840 4P G24q-2

# CorePro LED PLC 4P


## Lifetime

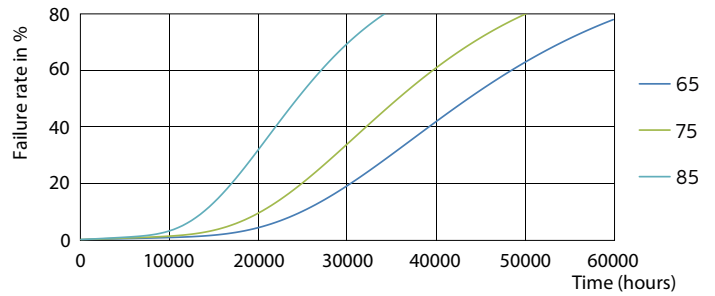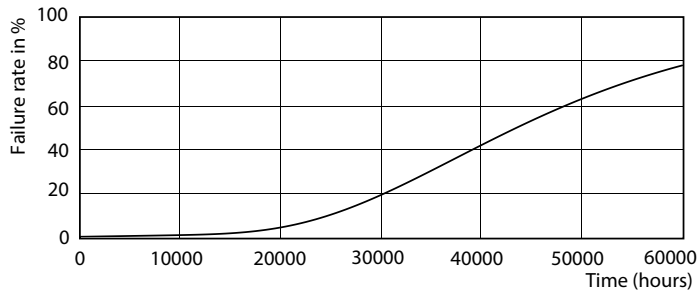


Life Expectancy Diagram - CorePro LED PLC 6.5W 840 4P G24q-2

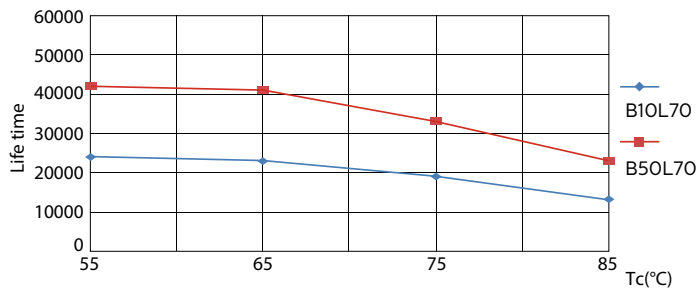

Life Expectancy Diagram - CorePro LED PLC 6.5W 840 4P G24q-2

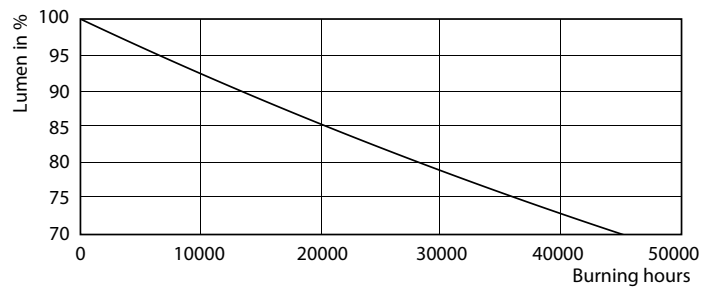

Life Expectancy Diagram - CorePro LED PLC 6.5W 840 4P G24q-2



Lumen Maintenance Diagram - CorePro LED PLC 6.5W 840 4P G24q-2

Lumen Maintenance Diagram - CorePro LED PLC 6.5W 840 4P G24q-2

## CorePro LED PLC 4P

