



MASTER VALUE LEDspot MV



MAS LED spot VLE D 3.7-35W GU10 930 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings that normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone
Light Technical	
Color Code	930 [CCT of 3000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	270 lumen

Luminous Intensity (Nom)	500 cd
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	81 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	270 lumen

Operating and Electrical

Line Frequency	50 to 60 Hz
----------------	-------------

MASTER VALUE LEDspot MV

Input Frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp Current (Nom)	20 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.8
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------

Approval and Application


Energy Efficiency Class	F
-------------------------	---

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	400287
CE mark	Yes
EU RoHS compliant	Yes

Product Data


Full product code	871869670775300
Order product name	MAS LED spot VLE D 3.7-35W GU10 930 36D
Order code	929001348302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929001348302
Full product name	MAS LED spot VLE D 3.7-35W GU10 930 36D
EAN/UPC - Case	8718696707760

Dimensional drawing




Product	D	C
MAS LED spot VLE D 3.7-35W GU10 930 36D	50 mm	54 mm

Photometric data




Accent Lighting Spots - MAS LED spot VLE D 3.7-35W GU10 930 36D

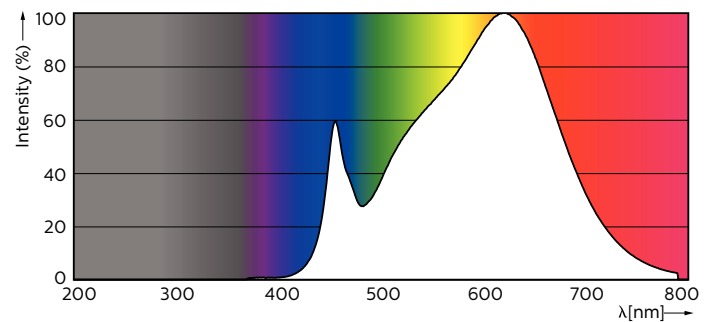

Spectral Power Distribution Colour - MAS LED spot VLE D 3.7-35W GU10 930 36D

MASTER VALUE LEDspot MV

Photometric data

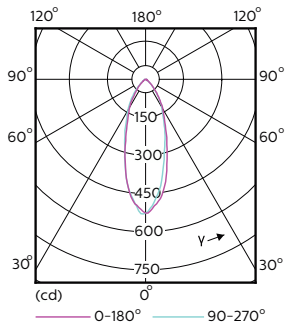


Light Distribution Diagram - MAS LED spot VLE D 3.7-35W GU10 930 36D

Lifetime



Life Expectancy Diagram - MAS LED spot VLE D 3.7-35W GU10 930 36D



Lumen Maintenance Diagram - MAS LED spot VLE D 3.7-35W GU10 930 36D

