



CorePro Glass LED bulbs



CorePro LEDBulb10.5-100W E27 A60 840 FRG

CorePro, LEDbulb, A60, 100 W, E27, 4000 K, 1521 lm, CRI 80, 15000 hour(s), Glass

CorePro, LEDbulb, A60, 100 W, E27, 4000 K, 1521 lm, CRI 80, 15000 hour(s), Glass, 144.00 lm/W, EEL D, PF 0.52, Beam angle 300 degree(s), RG1, IP20, SVM 0.4, PstLM
1

Product data

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LEDbulb
Flux measurement reference	Sphere
Warranty period	2 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	1,521 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	144.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %


Photobiological safety according to EN 62471		RG1
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	10.5 W	
Lamp Current (Nom)	90 mA	
Wattage Equivalent	100 W	
Starting Time (Nom)	0.4 s	
Warm-up time to 60% light	0.4 s	
Power Factor (Fraction)	0.52	
Voltage (Nom)	230 V	
Temperature		
T-Case Maximum (Nom)	55 °C	

CorePro Glass LED bulbs

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	A60
Net Weight (Piece)	0.030 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	11 kWh
EPREL Registration Number	387432
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions	
can it be used in closed luminaires	No
Wireless Technology	Not applicable
Product Data	
Order product name	CorePro LEDBulb10.5-100W E27 A60 840 FRG
Full product name	CorePro LEDBulb10.5-100W E27 A60 840 FRG
Full product code	871951437755400
Order code	929002026592
Material Nr. (12NC)	929002026592
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514377554
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514377561

Dimensional drawing




Product	D	C
CorePro LEDBulb10.5-100W E27 A60 840 FRG	60 mm	104 mm

Photometric data

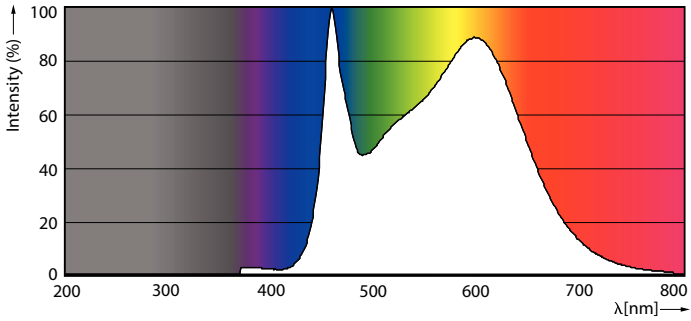


Spectral Power Distribution Colour - CorePro LEDBulb10.5-100W E27 A60 840 FRG



Light Distribution Diagram - CorePro LEDBulb10.5-100W E27 A60 840 FRG


CorePro Glass LED bulbs

Photometric data




General uniform lighting - CorePro LEDBulb10.5-100W E27 A60 840 FRG

Lifetime

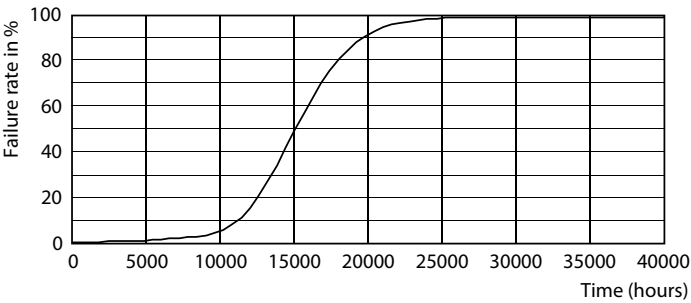

Bulb A67 100W 1521lm 2700K E27 NDFrosted

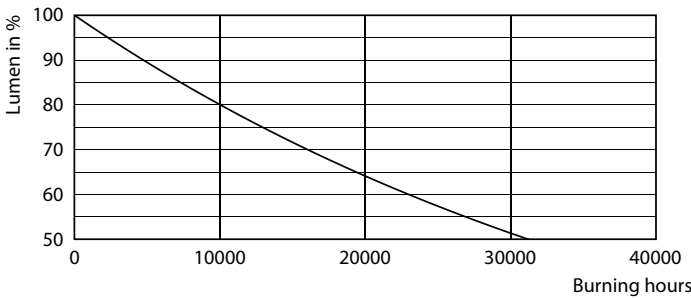

Lumen Maintenance Diagram - CorePro LEDBulb10.5-100W E27 A60 840 FRG

