



CorePro LED spot MV



CorePro LEDspot 3-35W GU10 840 36D DIM

CorePro, LEDspot, PAR16, 35 W, GU10, 4000 K, 240 lm, CRI 80, 15000 hour(s), Glass

CorePro, LEDspot, PAR16, 35 W, GU10, 4000 K, 240 lm, CRI 80, 15000 hour(s), Glass, 80 lm/W, EEL F, PF 0.55, Beam angle 36 degree(s), RG1, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	GU10
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDspot
Flux measurement reference	Narrow Cone
Warranty period	2 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	240 lm
Luminous Intensity (Nom)	500 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	80 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	240 lm

Photobiological safety according to EN 62471		RG1
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	3 W	
Lamp Current (Nom)	22 mA	
Wattage Equivalent	35 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.55	
Voltage (Nom)	220-240 V	
Temperature		
T-Case Maximum (Nom)	55 °C	
Controls and Dimming		
Dimmable	Only with specific dimmers	
Mechanical and Housing		
Bulb Finish	Clear	

CorePro LED spot MV

Bulb Material	Glass
Bulb Shape	PAR16
Net Weight (Piece)	0.048 kg

Approval and Application

Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	3 kWh
EPREL Registration Number	391906
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C

Application Conditions


can it be used in closed luminaires	No
-------------------------------------	----

Wireless Technology	Not applicable
---------------------	----------------

Product Data



Order product name	CorePro LEDspot 3-35W GU10 840 36D DIM
Full product name	CorePro LEDspot 3-35W GU10 840 36D DIM
Full product code	871869673022500
Order code	929002065602
Material Nr. (12NC)	929002065602
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696730225
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696730232

Dimensional drawing



Product	D	C
CorePro LEDspot 3-35W GU10 840 36D DIM	50 mm	54 mm

Photometric data




Accent Lighting Spots - CorePro LEDspot 3-35W GU10 840 36D DIM

Light Distribution Diagram - CorePro LEDspot 3-35W GU10 840 36D DIM

CorePro LED spot MV

Photometric data

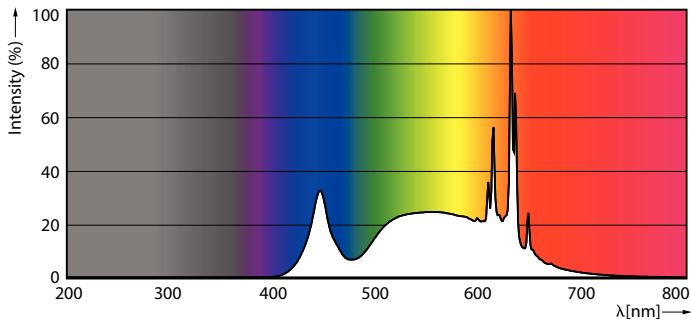


Spectral Power Distribution Colour - CorePro LEDspot 3-35W GU10 840 36D DIM

Lifetime



Life Expectancy Diagram

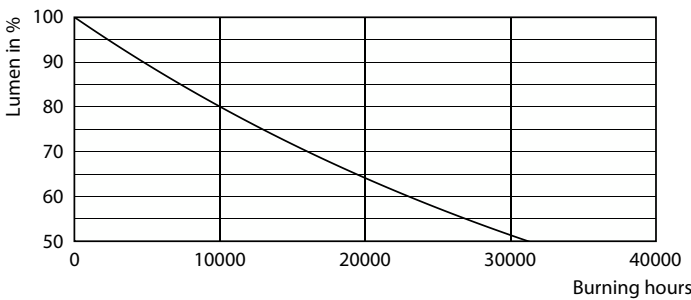

Lumen Maintenance Diagram - CorePro LEDspot 3-35W GU10 840 36D DIM

