



MASTER VALUE LED spot LV



MAS LED SPOT VLE D 7.5-50W MR16 940 36D

MASTER Value, LEDspot, MR16, 50 W, GU5.3, 4000 K, 660 lm, CRI 90, 25000 hour(s), Glass

MASTER Value, LEDspot, MR16, 50 W, GU5.3, 4000 K, 660 lm, CRI 90, 25000 hour(s), Glass, 88.00 lm/W, EEL F, PF 0.7, Beam angle 36 degree(s), RG1, IP20

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information		Color Designation	
Cap-Base	GU5.3	Cool White (CW)	
Nominal lifetime	25,000 hour(s)	Correlated Color Temperature (Nom)	
Switching Cycle	50,000	4000 K	
Lighting Technology	LEDspot	Luminous Efficacy (rated) (Nom)	
Flux measurement reference	Narrow Cone	88.00 lm/W	
Warranty period	5 years	Color Consistency	
		<6	
		Color rendering index (CRI)	
		90	
		LLMF At End Of Nominal Lifetime (Nom)	
		70 %	
		Luminous Flux in 90° Cone (Rated)	
		660 lm	
		Photobiological safety according to EN 62471	
		RG1	
Light Technical		Operating and Electrical	
Color Code	940 [CCT of 4000K]	Line Frequency	
Beam Angle (Nom)	36 degree(s)	- Hz	
Luminous Flux	660 lm	Input Frequency	
Luminous Intensity (Nom)	1,500 cd	- Hz	
		Power Consumption	
		7.5 W	

MASTER VALUE LED spot LV

Lamp Current (Nom)	660 mA
Wattage Equivalent	50 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	ac electronic 12 V

Temperature

T-Case Maximum (Nom)	95 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	MR16
Net Weight (Piece)	0.045 kg

Approval and Application

Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	453182

CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Ambient temperature range	-20 to +40 °C


Application Conditions

can it be used in closed luminaires	No
Wireless Technology	Not applicable

Product Data

Order product name	MAS LED SPOT VLE D 7.5-50W MR16 940 36D
Full product name	MAS LED SPOT VLE D 7.5-50W MR16 940 36D
Full product code	871951430736000
Order code	929002493402
Material Nr. (12NC)	929002493402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514307360
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514307377


Dimensional drawing




Product	D	C
MAS LED SPOT VLE D 7.5-50W MR16 940 36D	50.5 mm	45.5 mm

MASTER VALUE LED spot LV


Photometric data

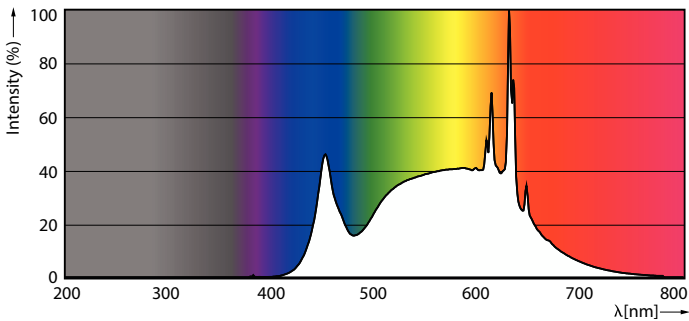

Spectral Power Distribution Colour - MAS LED SPOT VLE D 7.5-50W MR16 940 36D




Accent Lighting Spots - MAS LED SPOT VLE D 7.5-50W MR16 940 36D




Light Distribution Diagram - MAS LED SPOT VLE D 7.5-50W MR16 940 36D

Lifetime

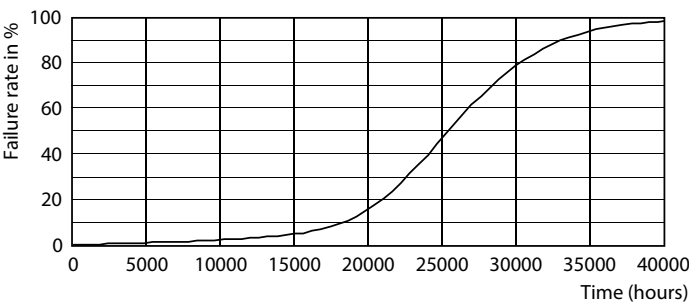

Life Expectancy Diagram

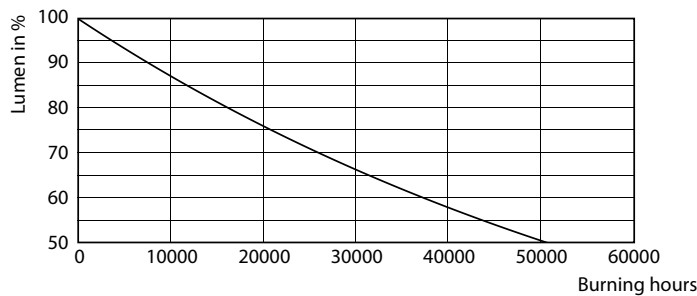

Lumen Maintenance Diagram - MAS LED SPOT VLE D 7.5-50W MR16 940 36D

MASTER VALUE LED spot LV

