



CorePro LED linear MV



CorePro R7S 118mm 7.2-60W 830

CorePro, LEDspot, R7S, 60 W, R7s, 3000 K, 810 lm, CRI 80, 15000 hour(s), Plastic

CorePro, LEDspot, R7S, 60 W, R7s, 3000 K, 810 lm, CRI 80, 15000 hour(s), Plastic, 112.00 lm/W, EEL E, PF 0.5, RGO, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	R7s
Nominal lifetime	15,000 hour(s)
Switching Cycle	8,000
Lighting Technology	LEDspot
Flux measurement reference	Sphere
Warranty period	2 years
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	810 lm
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	112.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RGO

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	7.2 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	110 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

CorePro LED linear MV

Bulb Material	Plastic
Bulb Shape	R7S
Net Weight (Piece)	0.016 kg

Approval and Application

Energy Efficiency Class	E
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	624213
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +40 °C


Application Conditions

can it be used in closed luminaires	No
Wireless Technology	Not applicable

Product Data



Order product name	CorePro R7S 118mm 7.2-60W 830
Full product name	CorePro R7S 118mm 7.2-60W 830
Full product code	871951430397300
Order code	929002495002
Material Nr. (12NC)	929002495002
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514303973
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514303980

Dimensional drawing

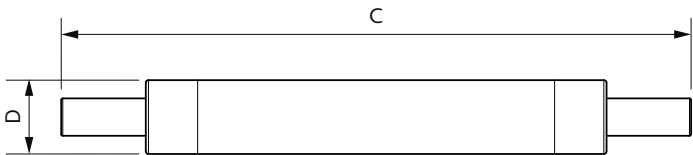

Product	D	C
CorePro R7S 118mm 7.2-60W 830	15 mm	118 mm

Photometric data

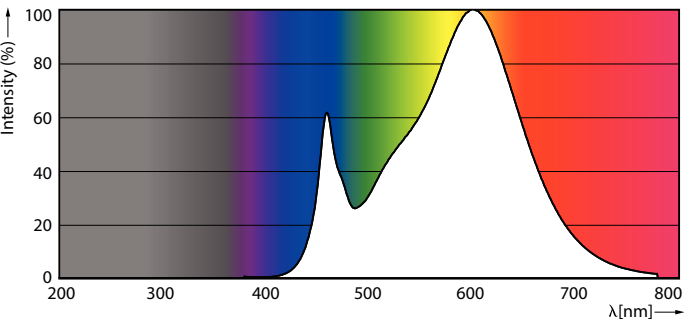


Light Distribution Diagram - CorePro R7S 118mm 7.2-60W 830

Spectral Power Distribution Colour - CorePro R7S 118mm 7.2-60W 830

CorePro LED linear MV

Photometric data




General Uniform Lighting - CorePro R7S 118mm 7.2-60W 830

General uniform lighting - CorePro R7S 118mm 7.2-60W 830

Lifetime



Life Expectancy Diagram

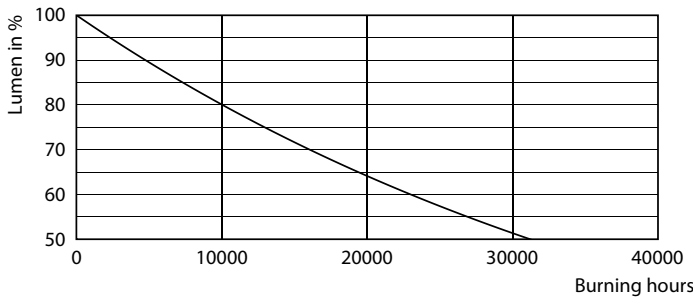

Lumen Maintenance Diagram - CorePro R7S 118mm 7.2-60W 830

