



# CorePro LEDcandle



## CorePro lustre ND 5-40W E14 827 P45 FR

The frosted CorePro LEDcandle is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E14 holder and is an attractive product for chandeliers. LEDlamps deliver huge energy savings and minimize maintenance cost.



### Product data

General information		Starting time (nom.)		0.5 s
Cap base	E14 [E14]	Warm-up time to 60% light	0.5 s	
Nominal lifetime	15,000 h	Power Factor (Fraction)	0.51	
Switching Cycle	50,000	Voltage (nom.)	220-240 V	
Lighting Technology	LED	Temperature		
Flux measurement reference	Sphere	T-Case maximum (nom.)	81 °C	
Light technical		Controls and dimming		
Colour Code	827 [CCT of 2700K]	Dimmable	No	
Luminous Flux	470 lm	Mechanical and housing		
Colour designation	Warm White (WW)	Lamp Finish	Frosted	
Correlated Colour Temperature	2700 K	Bulb shape	P45 [P 45 mm]	
Luminous Efficacy (rated) (Nom)	94.00 lm/W	Approval and application		
Colour consistency	<6	Energy Efficiency Class	F	
Colour rendering index (CRI)	80	Energy consumption kWh/1,000 hours	5 kWh	
LLMF at end of nominal lifetime (nom.)	70 %	EPREL registration number	453203	
Operating and electrical		CE mark	Yes	
Line Frequency	50 to 60 Hz	EU RoHS compliant	Yes	
Input frequency	50 to 60 Hz			
Power Consumption	5 W			
Lamp current (nom.)	44 mA			
Wattage equivalent	40 W			



# CorePro LEDcandle

## Lifetime

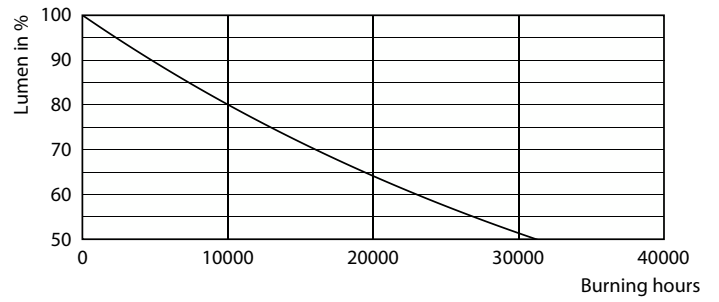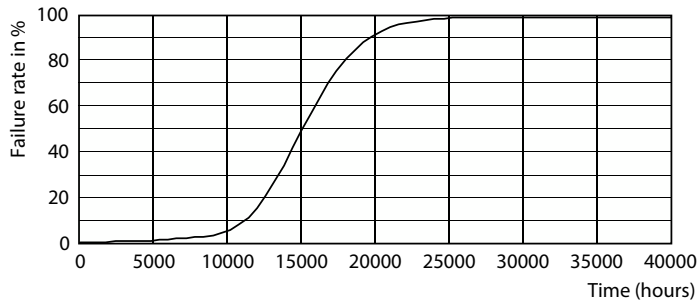

Life Expectancy Diagram - CorePro lustre ND 5-40W E14 827 P45 FR

Lumen Maintenance Diagram - CorePro lustre ND 5-40W E14 827 P45 FR

