



MASTER VALUE LEDspot MV

MAS LED spot VLE D 3.7-35W GU10 927 60D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Narrow Cone

Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	60 degree(s)
Luminous Flux	270 lumen

Luminous Intensity (Nom)	300 cd
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	72.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	270 lumen

Operating and Electrical	
Line Frequency	50 to 60 Hz

MASTER VALUE LEDspot MV

Input Frequency	50 to 60 Hz
Power Consumption	3.7 W
Lamp Current (Nom)	18 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V

Temperature

T-Case Maximum (Nom)	70 °C
----------------------	-------

Controls and Dimming

Dimmable	Only with specific dimmers
----------	----------------------------

Mechanical and Housing

Bulb Shape	PAR16 [PAR 2 inch/50mm]
------------	-------------------------

Approval and Application


Energy Efficiency Class	F
-------------------------	---

Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	467608
CE mark	Yes
EU RoHS compliant	Yes

Product Data



Full product code	871951431226500
Order product name	MAS LED spot VLE D 3.7-35W GU10 927 60D
Order code	929002979802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929002979802
Full product name	MAS LED spot VLE D 3.7-35W GU10 927 60D
EAN/UPC - Case	8719514312272

Dimensional drawing



Product	D	C
MAS LED spot VLE D 3.7-35W GU10 927 60D	50 mm	54 mm

Photometric data

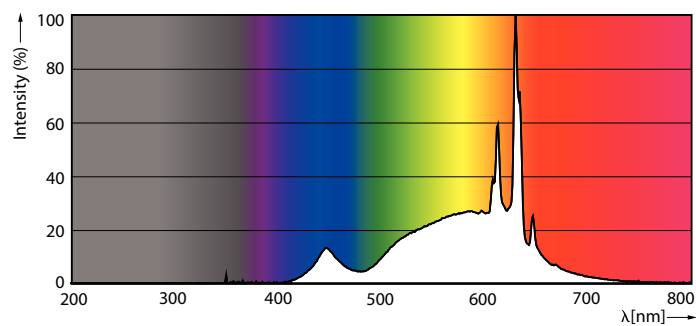


Copyright © 2023 Philips Lighting B.V. All rights reserved. Page 10

Spectral Power Distribution Colour - MAS LED spot VLE D 3.7-35W GU10 927 60D

Accent Lighting Spots - MAS LED spot VLE D 3.7-35W GU10 927 60D

MASTER VALUE LEDspot MV

Photometric data



Light Distribution Diagram - MAS LED spot VLE D 3.7-35W GU10 927 60D

Lifetime



Life Expectancy Diagram - MAS LED spot VLE D 3.7-35W GU10 927 60D



Lumen Maintenance Diagram - MAS LED spot VLE D 3.7-35W GU10 927 60D

