



# MASTER VALUE LEDspot MV

## MAS LED spot VLE D 3.7-35W GU10 930 60D

Delivering a warm, halogen-like accent beam, MASTER VALUE is a perfect fit for spot lighting. Thanks to its high CRI, it realizes more natural colors, creating cozy and comfortable ambiances for residential and hospitality projects, and emphasizing the beauty of merchandise in retail. These LED spots MV GU10 have the familiar look and feel of spot lamps, keeping the classic beauty of glass spots and adding the strong performance of LED technology. The dimming function enables you to create the atmosphere you desire, and it works with broad selection of dimmers. MASTER VALUE also offers more energy savings than normal LED spots.

### Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights

### Product data

| General Information        |                    |
|----------------------------|--------------------|
| Cap-Base                   | GU10 [GU10]        |
| Nominal lifetime           | 25,000 hour(s)     |
| Switching Cycle            | 50,000             |
| Lighting Technology        | LED                |
| Flux measurement reference | Narrow Cone        |
| Light Technical            |                    |
| Color Code                 | 930 [CCT of 3000K] |
| Beam Angle (Nom)           | 60 degree(s)       |
| Luminous Flux              | 270 lumen          |

|                                       |            |
|---------------------------------------|------------|
| Luminous Intensity (Nom)              | 300 cd     |
| Color Designation                     | White (WH) |
| Correlated Color Temperature (Nom)    | 3000 K     |
| Luminous Efficacy (rated) (Nom)       | 72.00 lm/W |
| Color Consistency                     | <6         |
| Color rendering index (CRI)           | 90         |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %       |
| Luminous Flux in 90° Cone (Rated)     | 270 lumen  |

| Operating and Electrical |             |
|--------------------------|-------------|
| Line Frequency           | 50 to 60 Hz |

# MASTER VALUE LEDspot MV

|                           |             |
|---------------------------|-------------|
| Input Frequency           | 50 to 60 Hz |
| Power Consumption         | 3.7 W       |
| Lamp Current (Nom)        | 18 mA       |
| Wattage Equivalent        | 35 W        |
| Starting Time (Nom)       | 0.5 s       |
| Warm-up time to 60% light | 0.5 s       |
| Power Factor (Fraction)   | 0.9         |
| Voltage (Nom)             | 220-240 V   |

## Temperature

|                      |       |
|----------------------|-------|
| T-Case Maximum (Nom) | 70 °C |
|----------------------|-------|

## Controls and Dimming

|          |                            |
|----------|----------------------------|
| Dimmable | Only with specific dimmers |
|----------|----------------------------|

## Mechanical and Housing

|            |                         |
|------------|-------------------------|
| Bulb Shape | PAR16 [PAR 2 inch/50mm] |
|------------|-------------------------|

## Approval and Application


|                         |   |
|-------------------------|---|
| Energy Efficiency Class | F |
|-------------------------|---|

|                               |        |
|-------------------------------|--------|
| Suitable For Accent Lighting  | Yes    |
| Energy Consumption kWh/1000 h | 4 kWh  |
| EPREL Registration Number     | 467613 |
| CE mark                       | Yes    |
| EU RoHS compliant             | Yes    |

## Product Data



|                                 |   |
|---------------------------------|---|
| Full product code               | 871951431230200                         |
| Order product name              | MAS LED spot VLE D 3.7-35W GU10 930 60D |
| Order code                      | 929002979902                            |
| Numerator - Quantity Per Pack   | 1                                       |
| Numerator - Packs per outer box | 10                                      |
| Material number (12NC)          | 929002979902                            |
| Full product name               | MAS LED spot VLE D 3.7-35W GU10 930 60D |
| EAN/UPC - Case                  | 8719514312319                           |

## Dimensional drawing



| Product                                 | D     | C     |
|---|-------|-------|
| MAS LED spot VLE D 3.7-35W GU10 930 60D | 50 mm | 54 mm |

## Photometric data




Accent Lighting Spots - MAS LED spot VLE D 3.7-35W GU10 930 60D

Light Distribution Diagram - MAS LED spot VLE D 3.7-35W GU10 930 60D


# MASTER VALUE LEDspot MV

## Photometric data

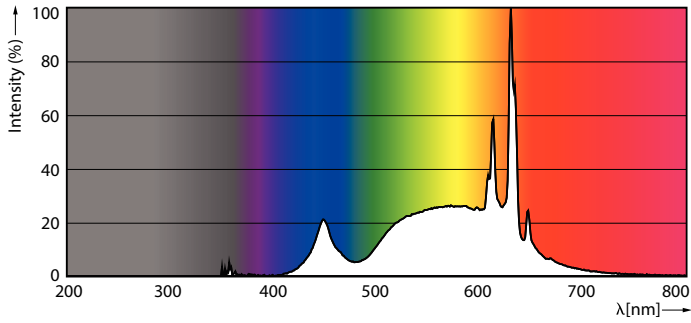

Spectral Power Distribution Colour - MAS LED spot VLE D 3.7-35W GU10 930 60D

## Lifetime

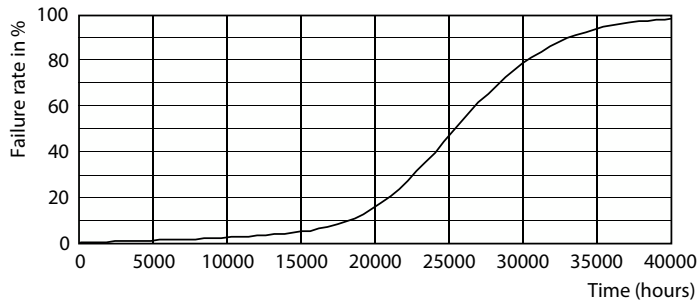

Life Expectancy Diagram - MAS LED spot VLE D 3.7-35W GU10 930 60D



Lumen Maintenance Diagram - MAS LED spot VLE D 3.7-35W GU10 930 60D

