



# Master Value Decorative LED candles and lusters

# MAS VLE LEDLusterD 2.6-15W E14 P45 SP G

The new Deco collection (candles and lusters) transforms your home with a perfect blend of (warm) white light and a lean, minimalistic lighting experience. With very long lifetime, up to 90% energy savings, no flickering and an instant full level brightness, you will also enjoy soft and evenly distributed light with that trendy and stylish charm for a welcoming harmony in your space.

### **Product data**

General Information	
Lighting Technology	LED
Switching Cycle	20,000
Nominal lifetime	15,000 hour(s)
Cap-Base	E14 [E14]
Light Technical	
Color Code	818 [CCT of 1800K]
Luminous Flux	136 lumen
Color Designation	1800
Correlated Color Temperature (Nom)	1800 K
Luminous Efficacy (rated) (Nom)	52.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM)	1
	· · · · · · · · · · · · · · · · · · ·

Stroboscopic effect value (SVM)	0.4
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2.6 W
Lamp Current (Nom)	14 mA
Wattage Equivalent	15 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.7
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	38 ℃


Datasheet, 2023, July 6 data subject to change

# Master Value Decorative LED candles and lusters

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Amber
Bulb Shape	P45 [P 45mm]
Approval and Application	
Energy Consumption kWh/1000 h	3 kWh
CE mark	Yes
EU RoHS compliant	Yes


Product Data		
Full product code	871951431605800	
Order product name	MAS VLE LEDLusterD 2.6-15W E14 P45 SP (	
Order code	929002983302	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	10	
Material number (12NC)	929002983302	
Full product name	MAS VLE LEDLusterD 2.6-15W E14 P45 SP G	
EAN/UPC - Case	8719514316065	


# Dimensional drawing



Product	D	С
MAS VLE LEDLusterD 2.6-15W E14 P45 SP G	46 mm	80 mm

### Photometric data

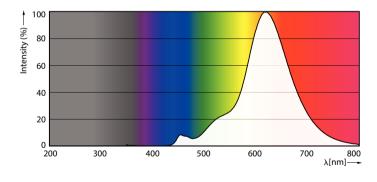




Spectral Power Distribution Colour - MAS VLE LEDLusterD 2.6-15W E14 P45

General uniform lighting - MAS VLE LEDLusterD 2.6-15W E14 P45 SP G


# Master Value Decorative LED candles and lusters


### Photometric data



Light Distribution Diagram - MAS VLE LEDLusterD 2.6-15W E14 P45 SP G

## Lifetime

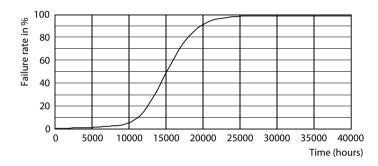



Life Expectancy Diagram - MAS VLE LEDLusterD 2.6-15W E14 P45 SP G

Lumen Maintenance Diagram - MAS VLE LEDLusterD 2.6-15W E14 P45 SP G



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.