



MASTER GLASS LED candles and lusters

MAS LEDLusterDT5.9-60W E14 927 P45 CL G

MASTER, LEDbulb, P45, 60 W, E14, 2200 K, 2700 K, 806 lm, CRI 90, 25000 hour(s), Glass

MASTER, LEDbulb, P45, 60 W, E14, 2200 K, 2700 K, 806 lm, CRI 90, 25000 hour(s), Glass, 136 lm/W, EEL D, PF 0.6, RG0, IP65, SVM 0.4, PstLM 0.9

Product data

General Information	
Cap-Base	E14
Nominal lifetime	25,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LEDbulb
Flux measurement reference	Sphere
Warranty period	5 years
Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Luminous Flux	806 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	136 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0


Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	5.9 W
Lamp Current (Nom)	40 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear

MASTER GLASS LED candles and lusters

Bulb Material	Glass
Bulb Shape	P45
Net Weight (Piece)	0.014 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	6 kWh
EPREL Registration Number	1109149
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.9
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 °C to 45 °C
Application Conditions	
can it be used in closed luminaires	No


Wireless Technology	Not applicable
Product Data	
Order product name	MAS LEDLusterDT5.9-60W E14 927 P45 CL G
Full product name	MAS LEDLusterDT5.9-60W E14 927 P45 CL G
Full product code	871951444961900
Order code	929003014182
Material Nr. (12NC)	929003014182
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514449619
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514449626

Dimensional drawing




Product	D	C
MAS LEDLusterDT5.9-60W E14 927 P45 CL G	45 mm	80 mm

Photometric data




Light Distribution Diagram - MAS LEDLusterDT5.9-60W E14 927 P45 CL G

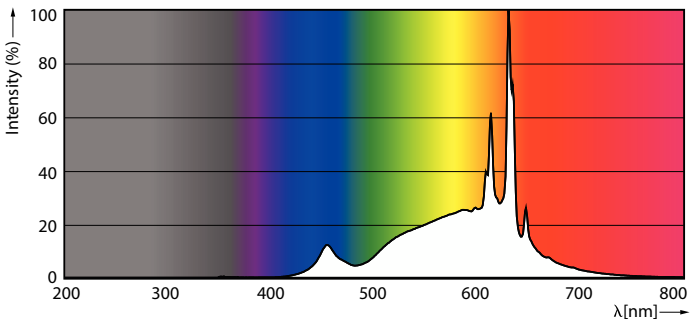

Spectral Power Distribution Colour - MAS LEDLusterDT5.9-60W E14 927 P45 CL G

MASTER GLASS LED candles and lusters


Photometric data




General Uniform Lighting - MAS LEDLusterDT5.9-60W E14 927 P45 CL G

General uniform lighting - MAS LEDLusterDT5.9-60W E14 927 P45 CL G

Lifetime

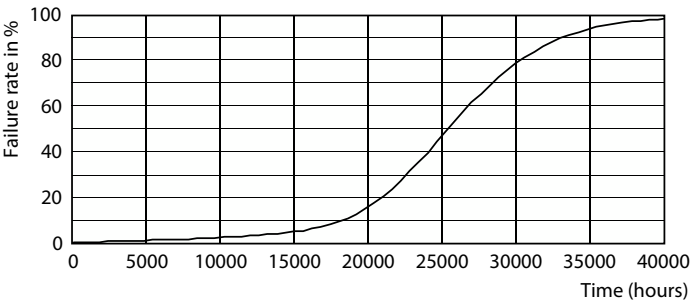

Life Expectancy Diagram

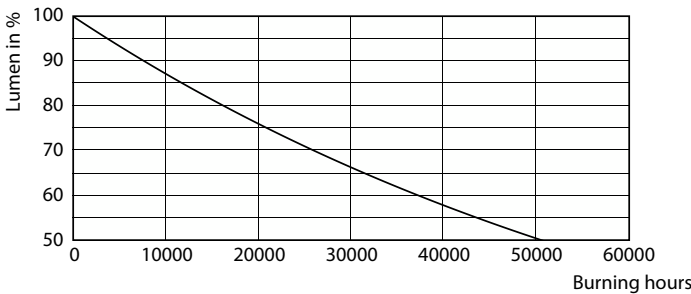

Lumen Maintenance Diagram - MAS LEDLusterDT5.9-60W E14 927 P45 CL G

