



MASTER Value Glass LED bulbs



MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G

MASTER Value, LEDbulb, A60, 40 W, E27, 2700 K, 470 lm, CRI 90, 15000 hour(s), Glass

MASTER Value, LEDbulb, A60, 40 W, E27, 2700 K, 470 lm, CRI 90, 15000 hour(s), Glass, 138.00 lm/W, EEL D, PF 0.7, Beam angle 300 degree(s), RG0, IP65, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LEDbulb
Flux measurement reference	Sphere
Warranty period	2.5 years
Light Technical	
Color Code	927 [CCT of 2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	470 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	138.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %


Photobiological safety according to EN 62471		RG0
Operating and Electrical		
Line Frequency	50 to 60 Hz	
Input Frequency	50 to 60 Hz	
Power Consumption	3.4 W	
Lamp Current (Nom)	20 mA	
Wattage Equivalent	40 W	
Starting Time (Nom)	0.5 s	
Warm-up time to 60% light	0.5 s	
Power Factor (Fraction)	0.7	
Voltage (Nom)	220-240 V	
Temperature		
T-Case Maximum (Nom)	80 °C	

MASTER Value Glass LED bulbs

Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	A60
Net Weight (Piece)	0.030 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	574383
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


Application Conditions	
can it be used in closed luminaires	No
Wireless Technology	Not applicable
Product Data	
Order product name	MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G
Full product name	MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G
Full product code	871951435481400
Order code	929003070502
Material Nr. (12NC)	929003070502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514354814
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514354821

Dimensional drawing




Product	D	C
MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G	60 mm	104 mm

Photometric data




Light Distribution Diagram - MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G

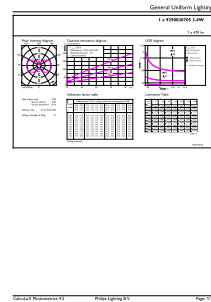

General uniform lighting - MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G

MASTER Value Glass LED bulbs

Photometric data

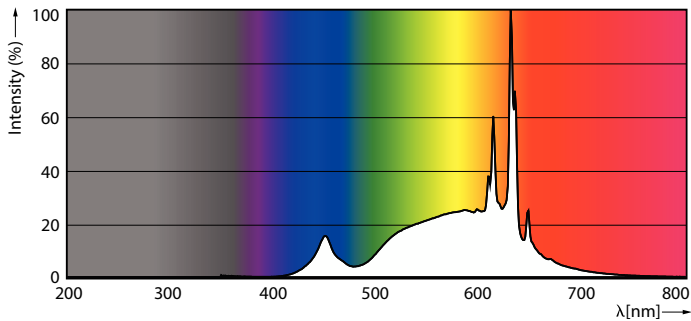

Spectral Power Distribution Colour - MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G

Lifetime



Life Expectancy Diagram



Lumen Maintenance Diagram - MAS VLE LEDBulbD3.4-40W E27 927 A60 CL G

