



Corepro - LED HID HPL



TForce Core LED HPL 36W E27 827 FR

CorePro, LED HPL, Oval, Mains only, 36 W, HPL 200W, SON 100W, E27, 2700 K, 5300 lm, CRI 80, 25000 hour(s)

CorePro, LED HPL, Oval, Mains only, 36 W, LED alternative to HPL 200W, SON 100W, E27, 2700 K, 5300 lm, CRI 80, 25000 hour(s), 147 lm/W, EEL D, PF 0.9, Beam angle 330 degree(s), Glass, RG0, IP65, SVM 2, PstLM 1

Warnings and Safety

• Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data

General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED HPL
Flux measurement reference	Sphere
Warranty period	3 years
Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	330 degree(s)
Luminous Flux	5,300 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	147 lm/W

Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	36 W
Lamp Current (Nom)	143 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Inrush current at mains	32
Max. lamp no. on MCB B type 10A - Mains	6

Corepro - LED HID HPL

Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – Mains	10
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Wattage Equivalent (LED HID only)	HPL 200W, SON 100W
Ballast Compatibility	Mains only

Temperature

T-Case Maximum (Nom)	48.7 °C
----------------------	---------

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Bulb Finish	Frosted
Bulb Material	Glass
Bulb Shape	Oval
Net Weight (Piece)	0.210 kg

Approval and Application

Energy Efficiency Class	D
Energy Saving Product	Yes

Energy Consumption kWh/1000 h	36 kWh
EPREL Registration Number	1617392
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	2
Ambient temperature range	-30 to +45 °C


Application Conditions

can it be used in closed luminaires	Yes
Wireless Technology	Not applicable

Product Data


Order product name	TForce Core LED HPL 36W E27 827 FR
Full product name	TForce Core LED HPL 36W E27 827 FR
Full product code	872016926783100
Order code	929003731402
Material Nr. (12NC)	929003731402
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169267831
Numerator - Packs per outer box	6
EAN/UPC - Case	8720169267848

Dimensional drawing




Product	D	C
TForce Core LED HPL 36W E27 827 FR	91.5 mm	249 mm


Photometric data

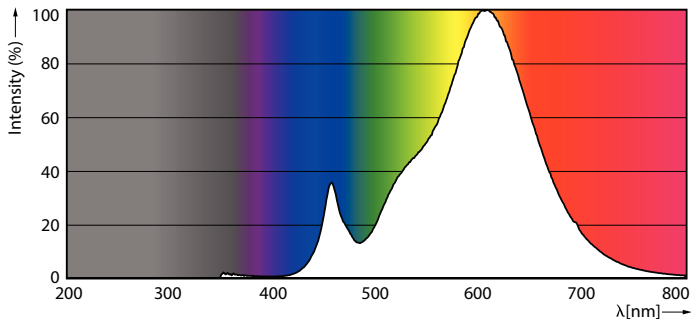


Spectral Power Distribution Colour - TForce Core LED HPL 36W E27 827 FR

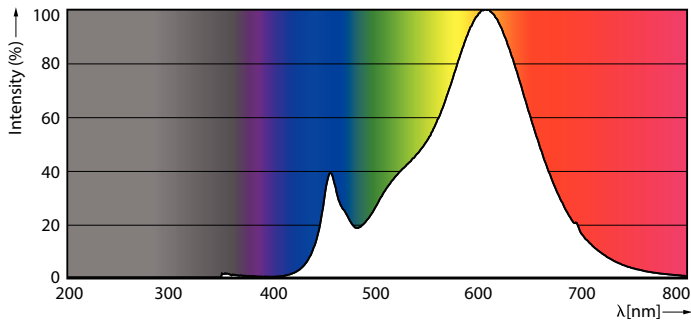


Spectral Power Distribution Colour - TForce Core LED HPL 36W E27 827 FR



Light Distribution Diagram - TForce Core LED HPL 36W E27 827 FR



Light Distribution Diagram - TForce Core LED HPL 36W E27 827 FR



General uniform lighting - TForce Core LED HPL 36W E27 827 FR


General uniform lighting - TForce Core LED HPL 36W E27 827 FR

Corepro - LED HID HPL

Lifetime



Life Expectancy Diagram

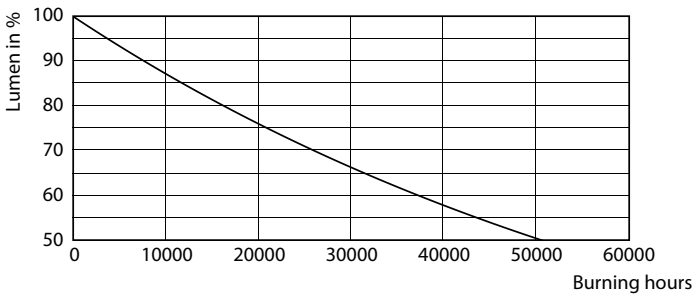

Lumen Maintenance Diagram - TForce Core LED HPL 36W E27 827 FR

