



CorePro LED PLC 4P



CorePro LED PLC 5.5W 840 4P G24q-1

CorePro, LED, PL-C, HF/Mains, 128 mm, 5.5 W, 13W PL-C, 4000 K, 660 lm, CRI 82, 30000 hour(s)

CorePro, LED, PL-C, HF/Mains, 128 mm, 5.5 W, LED alternative to 13W PL-C, 4000 K, 660 lm, CRI 82, 30000 hour(s), 120 lm/W, EEL E, G24Q-1 Rotatable end-cap, Beam angle 120 degree(s), Plastic, SDCM 6, PF 0.9, IP20, SVM 0.4, PstLM 1

Product data

General Information	
Cap-Base	G24Q-1 Rotatable end-cap
Nominal lifetime	30,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
Warranty period	3 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	120 degree(s)
Luminous Flux	660 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	120 lm/W
Color Consistency	<6
Color rendering index (CRI)	82
LLMF At End Of Nominal Lifetime (Nom)	70 %


Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	5.5 W
Lamp Current (Nom)	30 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	13W PL-C
Inrush current at mains	6
Max. lamp no. on MCB B type 10A - Mains	266
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	420
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-

CorePro LED PLC 4P

Ballast Compatibility	HF/Mains
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Plastic
Product Length	128 mm
Bulb Shape	PL-C
Net Weight (Piece)	0.100 kg
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	6 kWh
EPREL Registration Number	1945439
CE mark	Yes
EU RoHS compliant	Yes

Flickering value (PstLM) - Flickering value as per EN 61000-3-3		1
Stroboscopic effect visibility measure (SVM)		0.4
Ambient temperature range		-20 to +45 °C
Application Conditions		
can it be used in closed luminaires		Yes
Wireless Technology		Not applicable
Product Data		
Order product name	CorePro LED PLC 5.5W 840 4P G24q-1	
Full product name	CorePro LED PLC 5.5W 840 4P G24q-1	
Full product code	872016929043300	
Order code	929003757702	
Material Nr. (12NC)	929003757702	
Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8720169290433	
Numerator - Packs per outer box	10	
EAN/UPC - Case	8720169290440	


Dimensional drawing

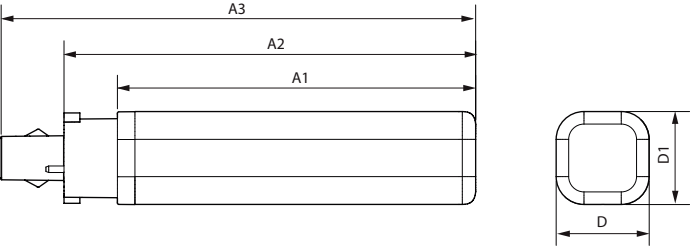


Product	D1	D2	A1	A2	A3
CorePro LED PLC 5.5W 840 4P G24q-1	34 mm	34 mm	109 mm	128 mm	144 mm

CorePro LED PLC 4P


Photometric data

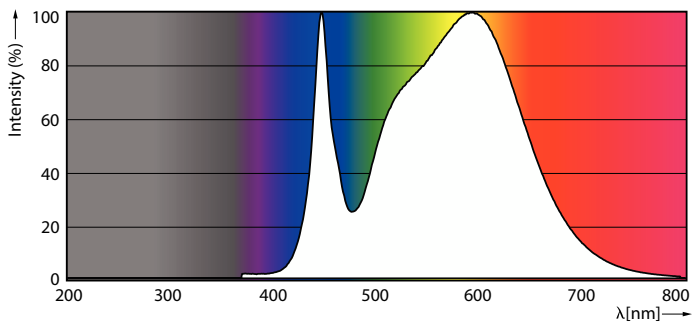

Spectral Power Distribution Colour - CorePro LED PLC 5.5W 840 4P G24q-1




Light Distribution Diagram - CorePro LED PLC 5.5W 840 4P G24q-1




Technical Information 13 Page Lighting 3/17 Page 1/1

General uniform lighting - CorePro LED PLC 5.5W 840 4P G24q-1

Lifetime

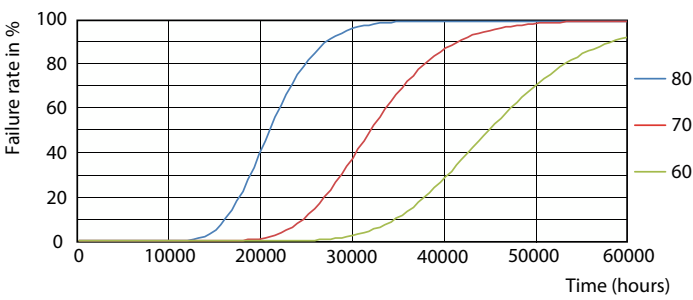

FailureRate

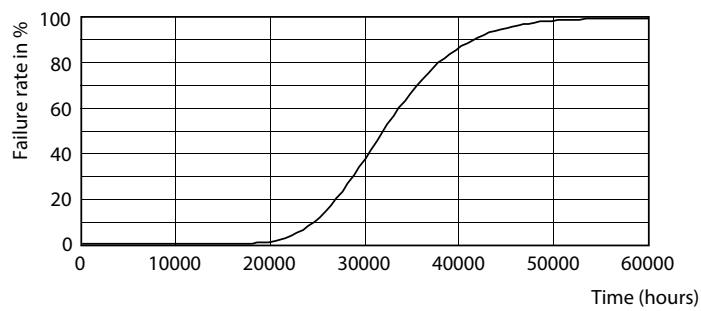


Life Expectancy Diagram

CorePro LED PLC 4P

Lifetime



Lumen Maintenance Diagram - CorePro LED PLC 5.5W 840 4P G24q-1

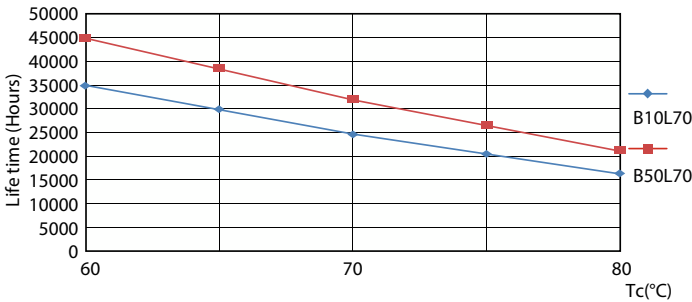

LifetimeVsTc



Lumen Maintenance Diagram - CorePro LED PLC 5.5W 840 4P G24q-1

