



MASTER Glass LED bulbs



MAS LEDBulb DT3.4-40W E27 CRI95A60CL G

LEDbulb, A60, 40 W, E27, 2200 K, 2700 K, 470 lm, CRI 95, 25000 hour(s), Glass

LEDbulb, A60, 40 W, E27, 2200 K, 2700 K, 470 lm, CRI 95, 25000 hour(s), Glass, 138 lm/W, EEL D, PF 0.6, Beam angle 300 degree(s), RG1, IP20, SVM 0.4, PstLM 0.9

Product data


General Information	
Cap-Base	E27
Nominal lifetime	25,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LEDbulb
Flux measurement reference	Sphere
Warranty period	5 years
Light Technical	
Color Code	922-927 [CCT of 2200K-2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	470 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2200 2700 K
Luminous Efficacy (rated) (Nom)	138 lm/W
Color Consistency	<6
Color rendering index (CRI)	95
LLMF At End Of Nominal Lifetime (Nom)	70 %

Photobiological safety according to EN 62471	RG1
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power Consumption	3.4 W
Lamp Current (Nom)	24 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers

MASTER Glass LED bulbs

Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	A60
Net Weight (Piece)	0.031 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1969961
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	0.9
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C



Dimensional drawing



Application Conditions	
can it be used in closed luminaires	No
Wireless Technology	Not applicable
Product Data	
Order product name	MAS LEDBulb DT3.4-40W E27 CRI95A60CL G
Full product name	MAS LEDBulb DT3.4-40W E27 CRI95A60CL G
Full product code	872016931091900
Order code	929003798502
Material Nr. (12NC)	929003798502
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169310919
Numerator - Packs per outer box	10
EAN/UPC - Case	8720169310926

Product	D	C
MAS LEDBulb DT3.4-40W E27 CRI95A60CL G	60 mm	108 mm

Photometric data

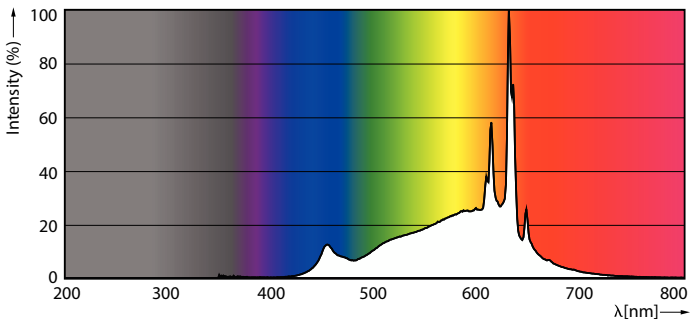


Spectral Power Distribution Colour - MAS LEDBulb DT3.4-40W E27 CRI95A60CL G

General uniform lighting - MAS LEDBulb DT3.4-40W E27 CRI95A60CL G


MASTER Glass LED bulbs

Photometric data

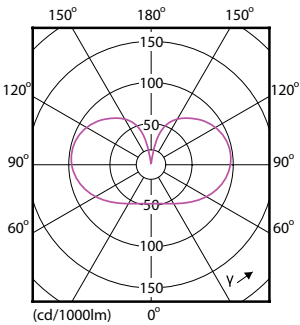


Light Distribution Diagram - MAS LEDBulb DT3.4-40W E27 CR195A60CL G

Lifetime

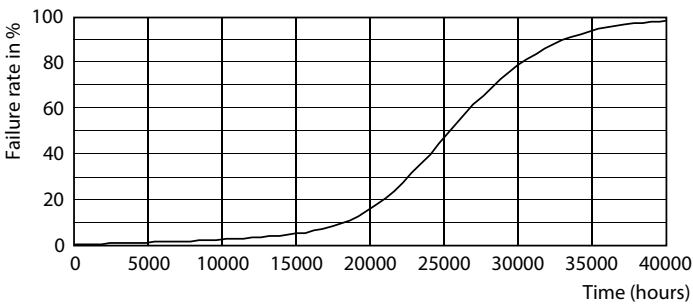

Life Expectancy Diagram

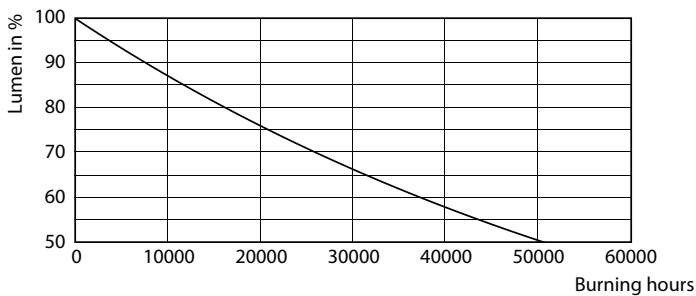

Lumen Maintenance Diagram - MAS LEDBulb DT3.4-40W E27 CR195A60CL G

