



MASTER SON PIA Plus

MASTER SON PIA Plus 70W E27

High Pressure Sodium lamp with opalized ovoid outer bulb, high output and long reliable lifetime

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap-Base	E27 [E27]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 5% Failures (Nom)	17000 h
Life To 10% Failures (Nom)	20000 h
Life to 20% Failures (Nom)	23500 h
Life to 50% Failures (Nom)	30000 h
System Description	External Ignitor
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	99 %
LSF 16000 h Rated	96 %
LSF 20000 h Rated	90 %
Flux measurement reference	Sphere


Light technical	
Color Code	220 [CCT of 2000K]
Luminous Flux (Nom)	6000 lm
Luminous Flux (Rated) (Nom)	6000 lm
Chromaticity Coordinate X (Nom)	0.54
Chromaticity Coordinate Y (Nom)	0.42
Correlated Color Temperature (Nom)	1900 K
Luminous Efficacy (rated) (Nom)	83.33 lm/W
Color Rendering Index (Max)	25
Color Rendering Index (Nom)	-
LLMF 2000 h Rated	90 %
LLMF 4000 h Rated	87 %
LLMF 6000 h Rated	86 %
LLMF 8000 h Rated	85 %
LLMF 12000 h Rated	83 %
LLMF 16000 h Rated	82 %
LLMF 20000 h Rated	81 %

MASTER SON PIA Plus

Ratio Scotopic/Photopic Lumens	0.50
Operating and electrical	
Power (Nom)	72.0 W
Lamp Current (EM) (Nom)	0.97 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	1800 V
Re-Ignition Time (Min) (Max)	180 s
Ignition Time (Max)	5 s
Voltage (Max)	105 V
Voltage (Min)	75 V
Voltage (Nom)	90 V
Controls and dimming	
Dimmable	Yes
Run-Up Time 90% (Max)	5 min
Mechanical and housing	
Bulb Finish	Coated glass
Bulb Shape	B70 [B 70mm]
Approval and application	
Energy Efficiency Class	G

Mercury (Hg) Content (Max)	12.2 mg
Mercury (Hg) Content (Nom)	12.2 mg
Energy Consumption kWh/1000 h	72 kWh
EPREL Registration Number	473312
Luminaire design requirements	
Bulb Temperature (Max)	350 °C
Cap-Base Temperature (Max)	200 °C
Product data	
Full product code	871829118040100
Order product name	MASTER SON PIA Plus 70W E27
EAN/UPC - Product	8718291180401
Order code	928061009835
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	24
Material Nr. (12NC)	928061009835
Net Weight (Piece)	0.055 kg

Dimensional drawing




MASTER SON PIA Plus 70W E27


Product	D (max)	C (max)
MASTER SON PIA Plus 70W E27	71 mm	156 mm

MASTER SON PIA Plus

Photometric data

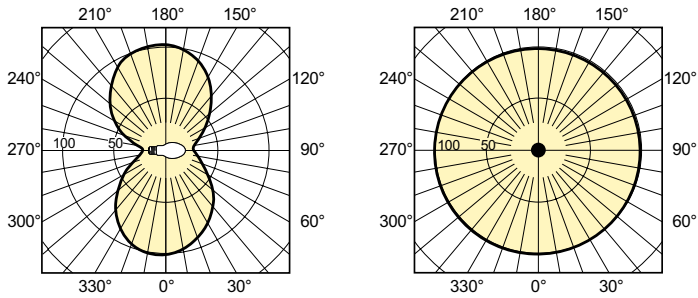


LDLD_SON-PIA_0002-Light distribution diagram

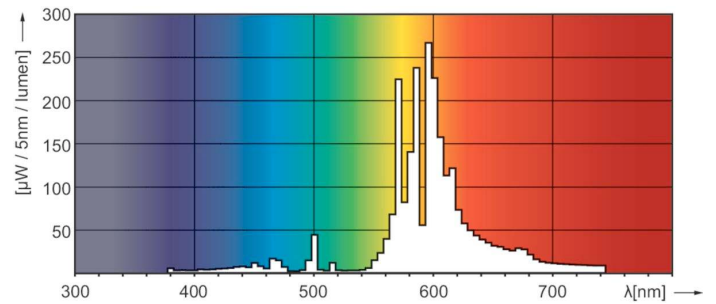


LDPO_SON-PIA_0004-Spectral power distribution Colour

Lifetime

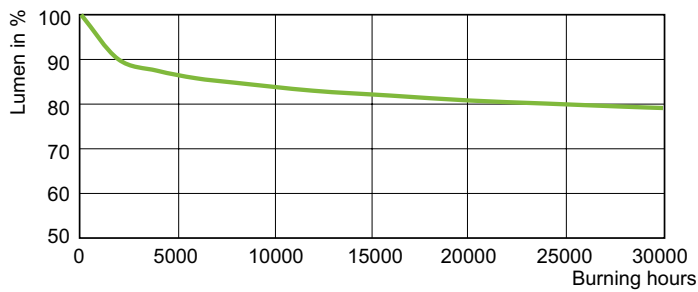

LDLM_SON-PIA_0007-Lumen maintenance diagram

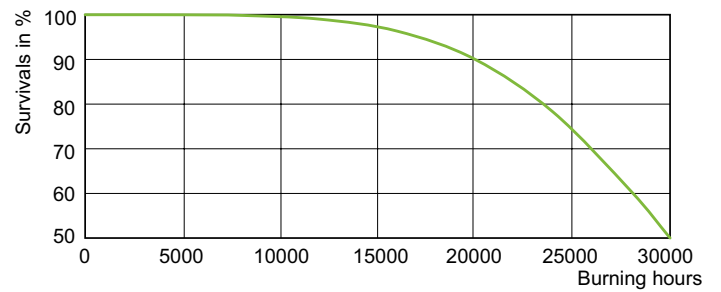

LDLE_SON-PIA_0006-Life expectancy diagram

