

Lighting

PHILIPS

MASTER TL5 High Output

MASTER TL5 HO 39W/840 SLV/20

This TL5 lamp (tube diameter 16 mm) offers high light output. The TL5 HO lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | Color Designation | Cool White (CW |
|-----------------------------------|----------------------|--|----------------|
| ap-Base | G5 [G5] | Luminous Efficacy (@ Max Lumen, Rated) (Nom) | 92 lm/W |
| ife to 50% Failures Preheat (Nom) | 30000 h | Correlated Color Temperature (Nom) | 4000 K |
| eatures | na [Not Applicable] | Luminous Efficacy (rated) (Nom) | 82 lm/W |
| ystem Description | High Output | Color Rendering Index (Max) | 85 |
| SF Preheat 2000 h Rated | 99 % | Color Rendering Index (Min) | 80 |
| SF Preheat 4000 h Rated | 99 % | Color Rendering Index (Nom) | 82 |
| SF Preheat 6000 h Rated | 99 % | LLMF 2000 h Rated | 96 % |
| SF Preheat 8000 h Rated | 99 % | LLMF 4000 h Rated | 95 % |
| SF Preheat 16000 h Rated | 97 % | LLMF 6000 h Rated | 94 % |
| SF Preheat 20000 h Rated 84 % | | LLMF 8000 h Rated | 93 % |
| | | LLMF 12000 h Rated | 92 % |
| ight Technical | | LLMF 16000 h Rated | 91 % |
| Color Code | 840 [CCT of 4000K] | LLMF 20000 h Rated | 90 % |
| uminous Flux (Nom) | 3500 lm | | |
| Luminous Flux (Rated) (Nom) | 3100 lm | | |


MASTER TL5 High Output

| Operating and Electrical | | | | |
|----------------------------|------------------|--|--|--|
| Power (Nom) | 38.0 W | | | |
| Lamp Current (Nom) | 0.325 A | | | |
| | | | | |
| Temperature | | | | |
| Design Temperature (Nom) | 35 ℃ | | | |
| | | | | |
| Controls and Dimming | | | | |
| Dimmable | Yes | | | |
| | | | | |
| Mechanical and Housing | | | | |
| Cap-Base Information | Green Plate | | | |
| Bulb Shape | T5 [16 mm (T5)] | | | |
| | | | | |
| Approval and Application | | | | |
| Mercury (Hg) Content (Nom) | 1.4 mg | | | |
| | | | | |

| | 42 kWh | | | |
|---------------------------------|------------------------------|--|--|--|
| | | | | |
| Product Data | | | | |
| Full product code | 871150063964605 | | | |
| Order product name | MASTER TL5 HO 39W/840 SLV/20 | | | |
| EAN/UPC - Product | 8711500639646 | | | |
| Order code | 927928584061 | | | |
| Numerator - Quantity Per Pack | 1 | | | |
| Numerator - Packs per outer box | 20 | | | |
| Material Nr. (12NC) | 927928584061 | | | |
| Net Weight (Piece) | 79.200 g | | | |
| ILCOS Code | FDH-39/40/1B-L/P-G5-16/850 | | | |


Dimensional drawing

| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|----------------|---------|----------|----------|----------|----------|
| MASTER TL5 HO | 17 mm | 849.0 mm | 856.1 mm | 853.7 mm | 863.2 mm |
| 39W/840 SLV/20 | | | | | |
| | | | | | |




TL5 HO 39W/840

Photometric data

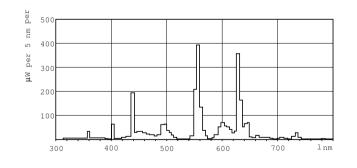


LDPB_TL5-HO8_840-Spectral power distribution B/W

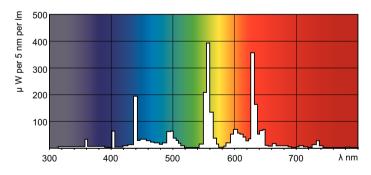




MASTER TL5 High Output

Lifetime

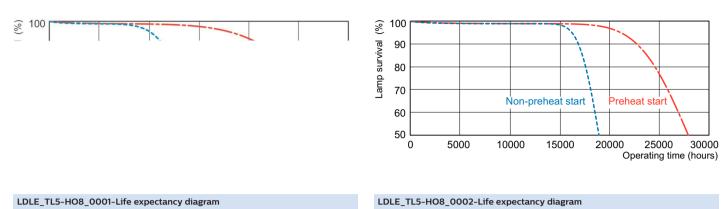

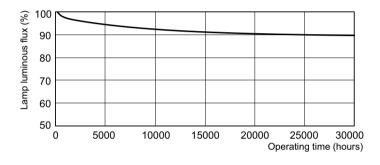

LDLM_TL5-HO8_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, August 17 - data subject to change