



CorePro LEDcapsule LV



CorePro LEDcapsuleLV 1.8-20W G4 827

The CorePro LEDcapsule is a true alternative to the halogen capsule. It is particularly suitable for task lighting and decorative applications in homes, shops, hotels and restaurants. Compatible with existing fixtures with G4 holders and designed for retrofit replacement of halogen capsules, CorePro LEDcapsule delivers huge energy savings and minimizes maintenance costs without any compromise on light quality.

Product data

General Information	
Lighting Technology	LED
Flux measurement reference	Sphere
Switching Cycle	50,000
Nominal lifetime	15,000 hour(s)
Cap-Base	G4 [G4]

Light Technical	
Color Code	827 [CCT of 2700K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	205 lumen
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	113.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM)	0.4
Stroboscopic effect value (SVM)	1

Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz
Power Consumption	1.8 W
Lamp Current (Nom)	260 mA
Wattage Equivalent	20 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	ac electronic 12 V

Temperature	
T-Case Maximum (Nom)	80 °C

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Shape	Capsule

CorePro LEDcapsule LV

Approval and Application


Energy Efficiency Class	F
Suitable For Accent Lighting	No
Energy Consumption kWh/1000 h	2 kWh
EPREL Registration Number	374873
CE mark	Yes
EU RoHS compliant	Yes

Product Data

Full product code	871869976765500
-------------------	-----------------



Order product name	CorePro LEDcapsuleLV 1.8-20W G4 827
Order code	929002389002
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material number (12NC)	929002389002
Full product name	CorePro LEDcapsuleLV 1.8-20W G4 827
EAN/UPC - Case	8718699767662

Dimensional drawing

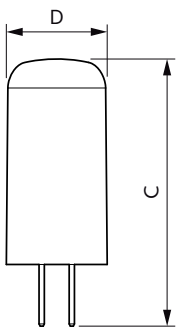

Product	D	C
CorePro LEDcapsuleLV 1.8-20W G4 827	13 mm	35 mm

Photometric data

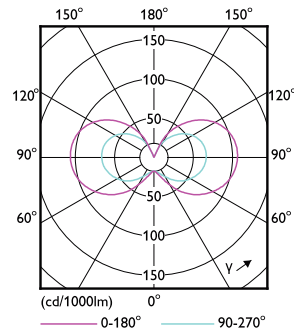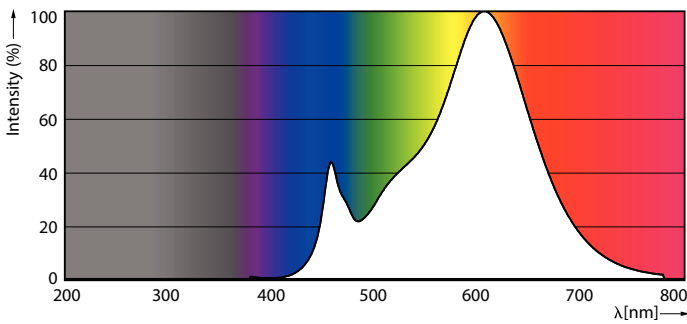


Spectral Power Distribution Colour - CorePro LEDcapsuleLV 1.8-20W G4 827

Light Distribution Diagram - CorePro LEDcapsuleLV 1.8-20W G4 827

CorePro LEDcapsule LV

Photometric data




General uniform lighting - CorePro LEDcapsuleLV 1.8-20W G4 827

General uniform lighting - CorePro LEDcapsuleLV 1.8-20W G4 827

Lifetime



Life Expectancy Diagram - CorePro LEDcapsuleLV 1.8-20W G4 827

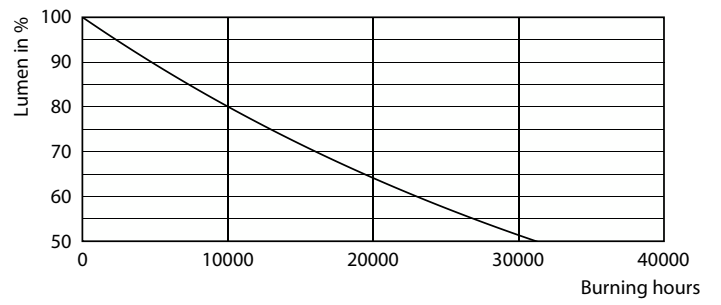

Lumen Maintenance Diagram - CorePro LEDcapsuleLV 1.8-20W G4 827

