



MASTER TL5 High Output Eco

MASTER TL5 HO Eco 50=54W/840 UNP/40

This extremely efficient TL5 lamp (tube diameter 16 mm) saves considerable energy by simple lamp-for-lamp replacement. The TL5 HO Eco lamp is optimized for installations requiring high light output and offers excellent lumen maintenance and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	G5 [G5]	Luminous Flux (Nom)	5000 lm
Life to 50% Failures Preheat (Nom)	30000 h	Luminous Flux (Rated) (Nom)	4450 lm
Features	na [Not Applicable]	Color Designation	Cool White (CW)
LSF Preheat 2000 h Rated	99 %	Luminous Efficacy (@ Max Lumen, Rated) (Nom)	102 lm/W
LSF Preheat 4000 h Rated	99 %	Correlated Color Temperature (Nom)	4000 K
LSF Preheat 6000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	93 lm/W
LSF Preheat 8000 h Rated	99 %	Color Rendering Index (Max)	85
LSF Preheat 16000 h Rated	99 %	Color Rendering Index (Min)	80
LSF Preheat 20000 h Rated	94 %	Color Rendering Index (Nom)	85
		LLMF 2000 h Rated	96 %
		LLMF 4000 h Rated	95 %
		LLMF 6000 h Rated	94 %
Light Technical			
Color Code	840 [CCT of 4000K]		

MASTER TL5 High Output Eco

LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical

Power (Nom)	48 W
Lamp Current (Nom)	0.460 A

Temperature

Design Temperature (Nom)	35 °C
--------------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application

Energy Efficiency Label (EEL)	A+
-------------------------------	----

Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	54 kWh

Product Data


Full product code	872790082591600
Order product name	MASTER TL5 HO Eco 50=54W/840 UNP/40
EAN/UPC - Product	8711500880055
Order code	927991284031
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927991284031
Net Weight (Piece)	105.800 g
ILCOS Code	FDH-50/40/1B-L/P-G5-16/1150

Dimensional drawing


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Eco 50=54W/840 UNP/40	17 mm	1149.0 mm	1156.1 mm	1153.7 mm	1163.2 mm

TL5 HO Eco 50=54W/840

Photometric data

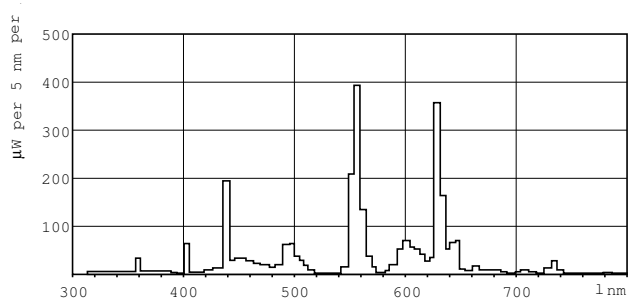


LDPB_TL5ECO_840-Spectral power distribution B/W

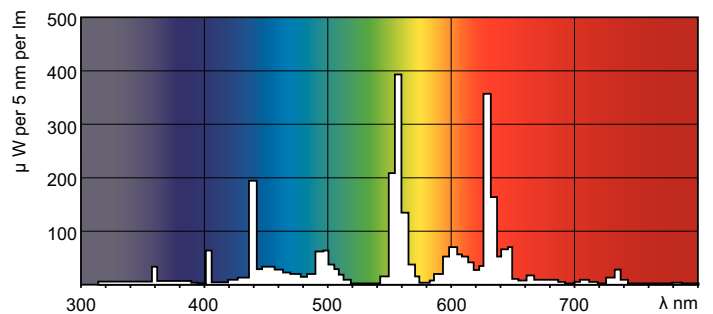

LDPO_TL5ECO_840-Spectral power distribution Colour


MASTER TL5 High Output Eco

Lifetime



LDLE_TL5ECO_0001-Life expectancy diagram

LDLE_TL5ECO_0002-Life expectancy diagram

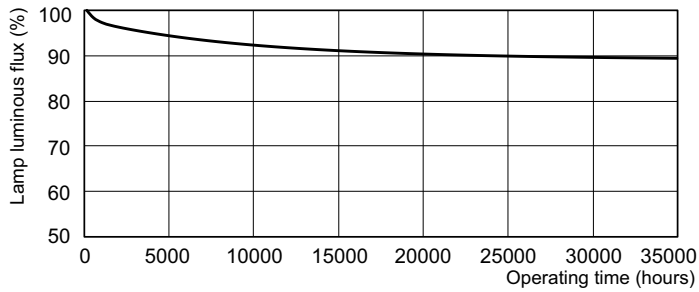

LDLM_TL5ECO_0001-Lumen maintenance diagram

