



Actinic BL TL-D(K) Secura

Actinic BL TL-DK Secura 36W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Voltage (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	50 V	50 V
Light Technical		Mechanical and Housing	
Color Code	10	Bulb Shape	T26 [T 26mm]
Color Designation	Actinic	Approval and Application	
Chromaticity Coordinate X (Nom)	225	Mercury (Hg) Content (Nom)	8.0 mg
Chromaticity Coordinate Y (Nom)	230	Product Data	
Operating and Electrical		Full product code	872790086085600
Power Consumption	36 W	Order product name	Actinic BL TL-DK Secura 36W/10 1SL/25
Lamp Current (Nom)	0.865 A		

Actinic BL TL-D(K) Secura

Order code	928019801003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material number (12NC)	928019801003


Full product name	Actinic BL TL-DK Secura 36W/10 1SL/25
EAN/UPC - Case	8727900860863

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-DK Secura 36W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Photometric data

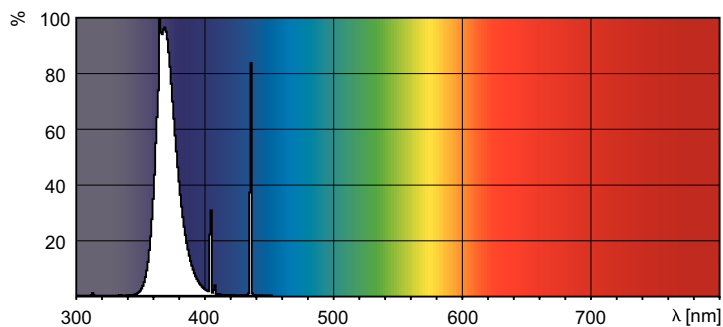

Spectral Power Distribution Colour - Actinic BL TL-DK Secura 36W/10 1SL/25

