



CorePro LED spot LV



CorePro LED spot ND 4.4-35W MR16 840 36D

CorePro, LEDspot, MR16, 35 W, GU5.3, 4000 K, 390 lm, CRI 80, 15000 hour(s), Glass

CorePro, LEDspot, MR16, 35 W, GU5.3, 4000 K, 390 lm, CRI 80, 15000 hour(s), Glass, 88.00 lm/W, EEL F, PF 0.6, Beam angle 36 degree(s), RG1, IP20

Product data

General Information	
Cap-Base	GU5.3
Nominal lifetime	15,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LEDspot
Flux measurement reference	Narrow Cone
Warranty period	2 years
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	36 degree(s)
Luminous Flux	390 lm
Luminous Intensity (Nom)	750 cd
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	88.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux in 90° Cone (Rated)	390 lm

Photobiological safety according to EN 62471 RG1	
Operating and Electrical	
Line Frequency	- Hz
Input Frequency	- Hz
Power Consumption	4.4 W
Lamp Current (Nom)	520 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	ac electronic 12 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

CorePro LED spot LV

Bulb Material	Glass
Bulb Shape	MR16
Net Weight (Piece)	0.045 kg

Approval and Application

Energy Efficiency Class	F
Suitable For Accent Lighting	Yes
Energy Consumption kWh/1000 h	5 kWh
EPREL Registration Number	421458
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Ambient temperature range	-20 to +40 °C

Application Conditions


can it be used in closed luminaires	No
-------------------------------------	----

Wireless Technology	Not applicable
---------------------	----------------

Product Data



Order product name	CorePro LED spot ND 4.4-35W MR16 840 36D
Full product name	CorePro LED spot ND 4.4-35W MR16 840 36D
Full product code	871951430708700
Order code	929002494702
Material Nr. (12NC)	929002494702
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514307087
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514307094

Dimensional drawing



Product	D	C
CorePro LED spot ND 4.4-35W MR16 840 36D	50.5 mm	45.5 mm

Photometric data

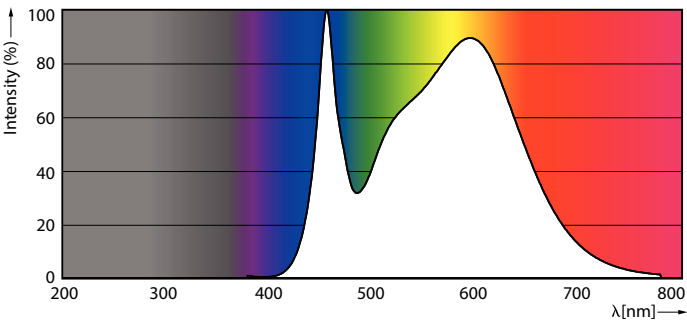


Accent Lighting Spots - CorePro LED spot ND 4.4-35W MR16 840 36D

Spectral Power Distribution Colour - CorePro LED spot ND 4.4-35W MR16 840 36D


CorePro LED spot LV

Photometric data




Light Distribution Diagram - CorePro LED spot ND 4.4-35W MR16 840 36D

Lifetime

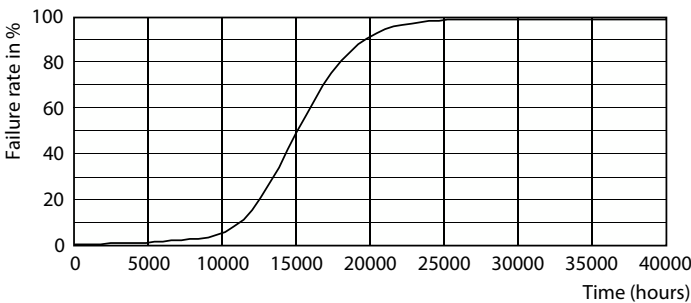

Life Expectancy Diagram

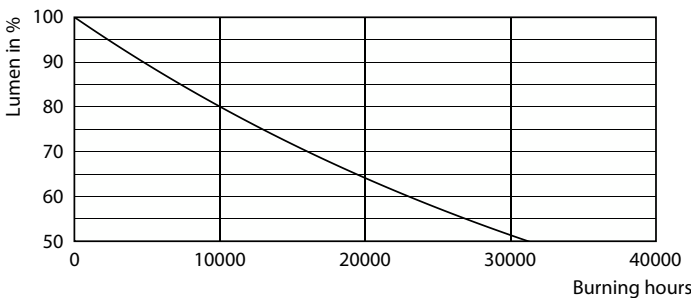

Lumen Maintenance Diagram - CorePro LED spot ND 4.4-35W MR16 840 36D

